



Compact Low Cost Booster EDFA (Full Function)

Features/Benefits

- Low cost
 - APC, ACC mode
 - Low power consumption
 - Wide operating temperature range
 - Standard communication interface (RS232, FC)

Applications

- Metropolitan and access networks
 - Digital CATV
 - Amplet for long-haul network
 - Single-channel or DWDM sub-systems
 - Optical cross-connects
 - Optical add/drop modules
 - Amplifier for transmitter line card
 - Power equalization and flexible pre-emphasis

Full Function Pin Assignment

Pin	RS-232	I ² C
1	Serial input	Serial bi-di data
2	GND	GND
3	Serial output	Serial clock
4	Alarm status	Alarm status
5	GND	GND
6	Power supply +3.3V	Power supply +3.3V

Safety Information

ESD Protection

The laser diodes and photodiodes in the module can be easily destroyed by electrostatic discharge. Use wrist straps, grounded work surfaces, and anti-static techniques when operating this module. When not in use, the module shall be kept in a static-free environment.


Optical Specifications

Parameters	Unit	Min.	Typ.	Max.
Operating Wavelength Range	nm	1528	-	1562
Input Optical Power (pin)	dBm	-10	-	0
Total Output Power @ Pin= -6 ~ 0dBm	dBm	8	-	-
		10	-	-
Noise Figure	dB	-	6	7
Polarization Dependent Gain	dB	-	-	0.5
Polarization Mode Dispersion	ps	-	-	0.5
Return Loss (pump LD off)	dB	35	-	-
Operating Temperature Range	°C	-5	-	70
Fiber Type	-	SMF-28, 900µm loose tube		
Dimensions	mm	40 x 70 x 12		


Electrical Specifications

Parameters	Unit	Min.	Typ.	Max.
Output Monitor Accuracy	dB	- 0.5	-	+ 0.5
Power Supply Voltage	V	3.1	3.3	3.5
Power Consumption	W	-	-	1.0

Dimensions

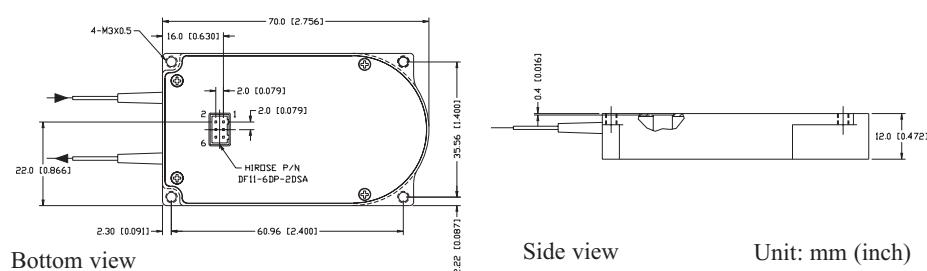

Ordering Information

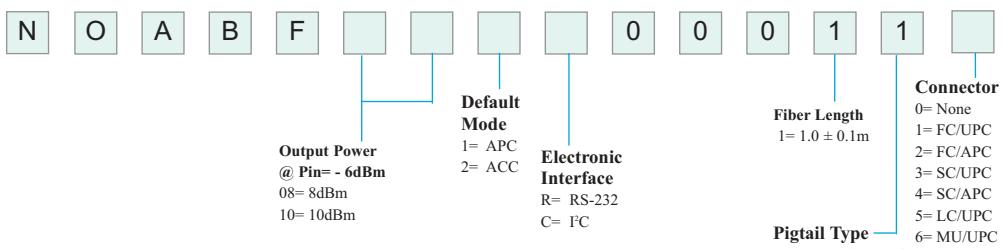

This product information is subject to change without notice.