


Covesion Ltd

MgO:PPLN for efficient wavelength conversion

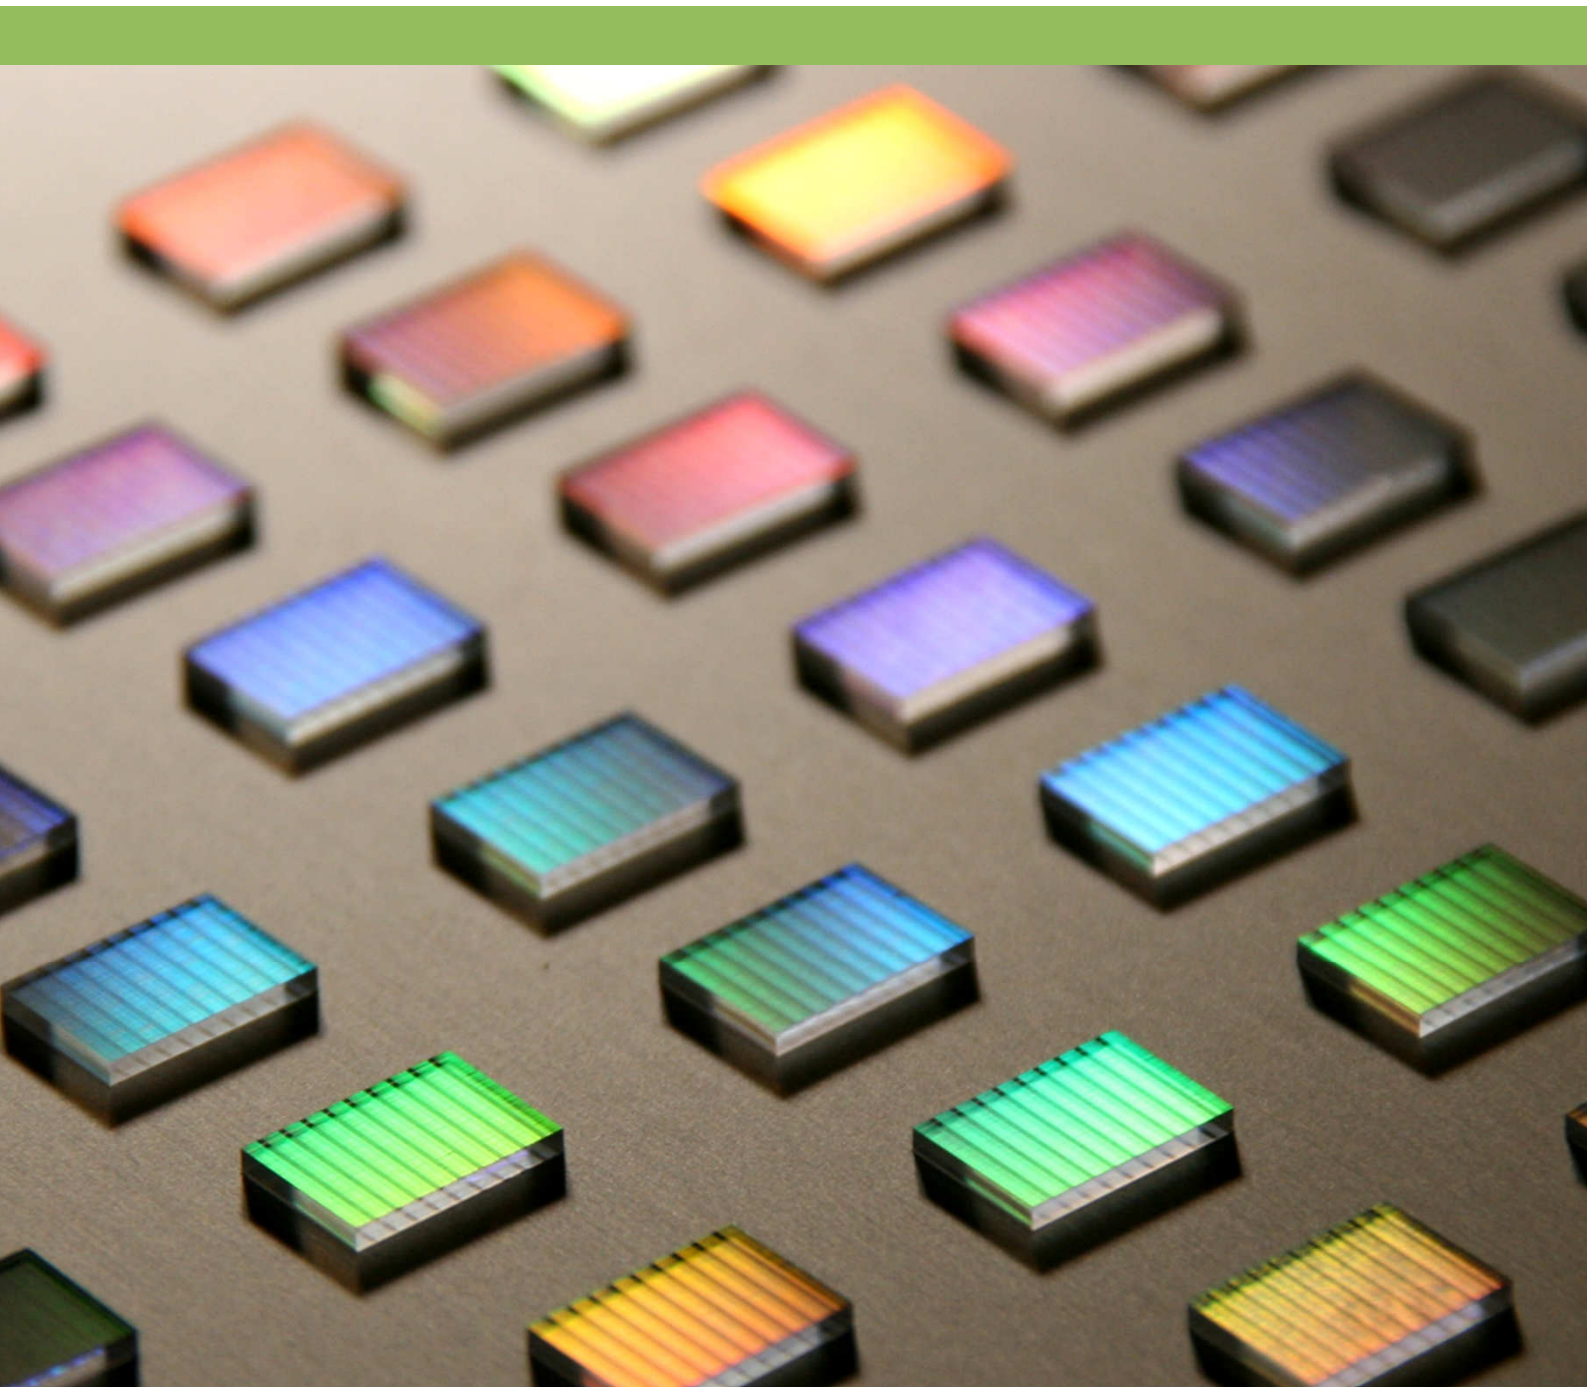


version 3.1

copyright © 2013 Covesion Ltd

covesion




MgO:PPLN for efficient wavelength conversion

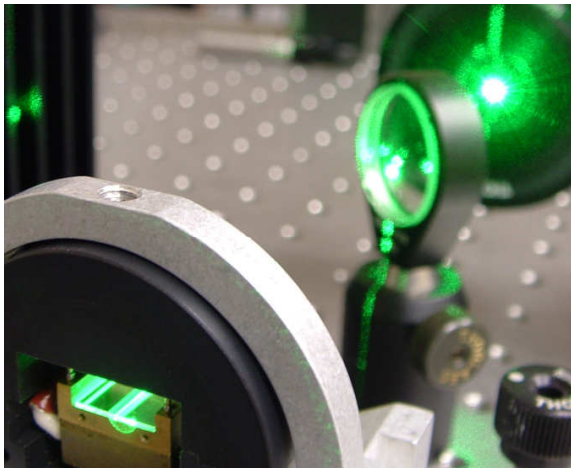

Covesion Ltd is a UK manufacturer of **Periodically Poled Lithium Niobate** (PPLN) materials, including **Magnesium Doped Periodically Poled Lithium Niobate** (MgO:PPLN or PPMgO:LN) as well as undoped PPLN.

PPLN and MgO:PPLN are nonlinear optical crystals for high efficiency wavelength conversion in the 460nm – 5100nm range. Our proprietary PPLN poling process creates high fidelity grating periods from 4.5 μ m to 33 μ m and is ideal for high volume manufacture.

We provide off-the-shelf crystals as well as custom crystals: from R&D requests to high volume OEM designs. Our team of PPLN engineers provide technical consultation and advice to assist in finding the right solution for your application.

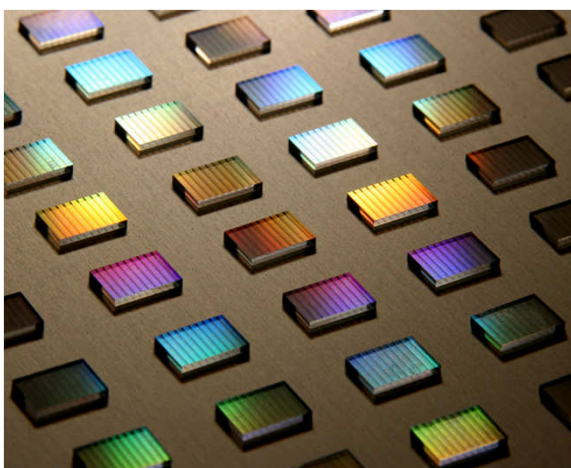

Covesion's optical engineers have designed a range of PPLN crystal clips, ovens, temperature controllers and mounting accessories, providing a **complete PPLN system** for easy integration into your optical arrangement.


Whether you are building a PPLN system for scientific research or prototype development, Covesion offers a complete PPLN solution designed for quick and simple integration with your laser arrangement.



MgO:PPLN for efficient wavelength conversion


Adding 5% magnesium-oxide to lithium niobate significantly increases the optical and photorefractive resistance of the crystal while preserving its high nonlinear coefficient [1]. This allows more stable operation at visible wavelengths and lower temperature operation than a similar undoped crystal. MgO:PPLN can be operated at temperatures as low as room temperature and in some cases, without temperature stabilisation. With temperatures from ambient up to 200°C, MgO:PPLN offers significantly wider wavelength operation than undoped PPLN.

Specially developed for red-green-blue generation and high power mid-IR operation, our proprietary MgO:PPLN poling process offers high fidelity periods from 4.5 μm to 33 μm + and is ideal for volume manufacture. As shown below, our MgO:PPLN domains are poled through the entire thickness of the sample, providing maximum optical aperture.

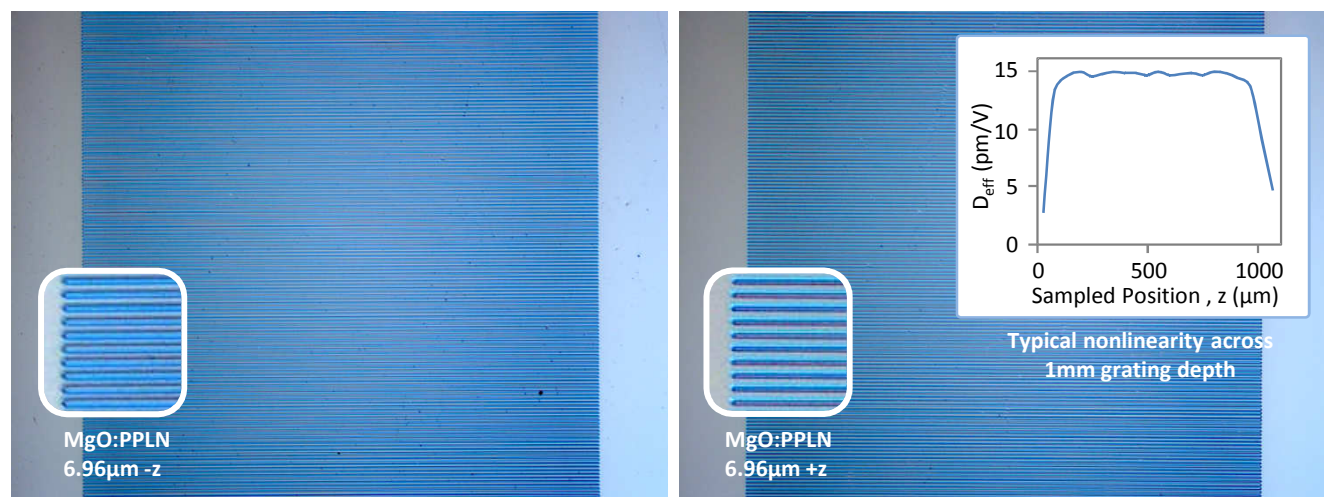


Our MgO:PPLN crystals are designed to work with a wide range of common laser wavelengths. Each off-the-shelf device includes multiple gratings for flexible temperature and wavelength operation. MgO:PPLN has a wide operating temperature range from 30-200°C.

Crystal lengths are 0.3mm to 1mm for short-pulse femtosecond lasers and 10mm to 40mm for ns to CW systems. Our standard crystals are supplied clip-mounted and off-the-shelf. Custom crystal lengths, thicknesses, AR coatings, and grating designs are also available upon request.

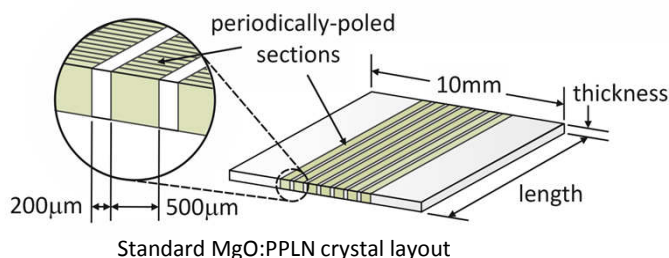


Standard MgO:PPLN crystal layout

- Multi-band AR coated
- Flatness $< \lambda/4 @ 633\text{nm}$
- Parallel to $\pm 5\text{minutes}$
- Better than 70:30 mark-to-space ratio
- Polished to 20-10 scratch dig
- Fewer than two 100 μm edge chips per facet

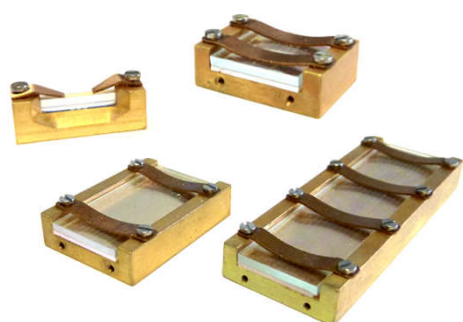

1, 10, 20 & 40mm clip-mounted MgO:PPLN

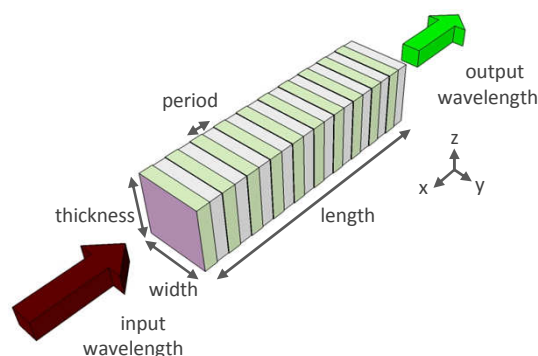


Pictorial representation of a PPLN grating where laser light focused into the grating is converted to another wavelength. This can be achieved with the correct poling period, crystal temperature, and z-axis polarization.

[1] "High-Beam-Quality Continuous Wave 3W Green-Light Generation in Bulk Periodically Poled MgO:LiNbO₃"
H.Furuya, A.Morikawa, K.Mizuuchi, K.Yamamoto, Japanese Journal of Applied Physics, Vol.45 No.8B pp.6704-6707 (2006)

MgO:PPLN for SHG: visible and near-IR wavelengths

Second Harmonic Generation

- High efficiency frequency doubling of IR lasers to visible and shorter near-IR wavelengths
- Available in 0.5mm and 1.0mm apertures
- Mounted and double-band AR coated




Applications

- Green and blue generation
- Scientific & medical
- Frequency comb stabilization
- Fluorescence microscopy

Our **SHG MgO:PPLN crystals** are designed to work with a wide range of common laser wavelengths. Each device has several gratings to allow phase matching at different temperatures. The visible wavelength devices contain 5 gratings designed for phase matching of the nominal pump wavelength typically between 30-110°C. Tuning to temperatures up to 200°C allows phase matching to longer wavelengths.

All of our products undergo rigorous quality inspection and are supplied clip-mounted and off-the-shelf. Custom crystal lengths, thicknesses, AR coatings, and grating designs are also available upon request.

Calculated temperature vs. phase matching wavelength tuning curve of MSHG1064

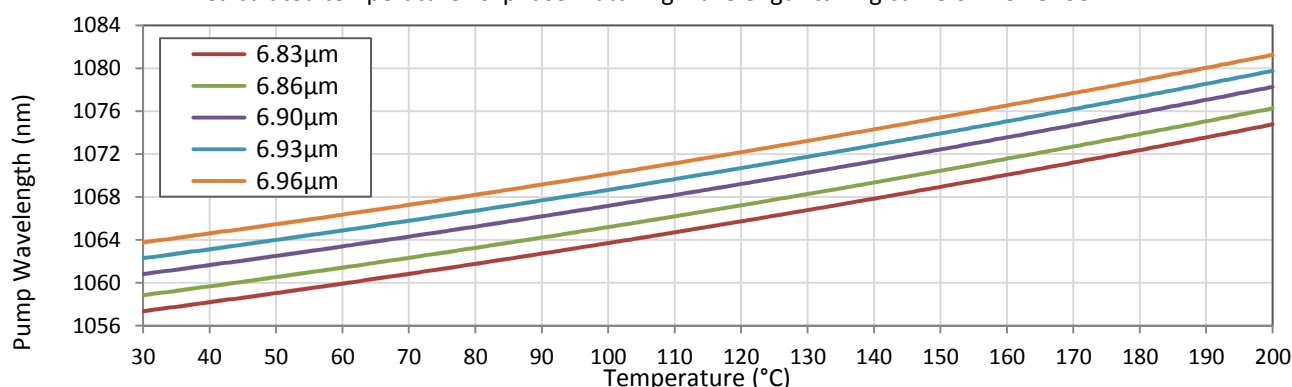

part #	pump (nm)	output (nm)	grating periods (μm)	temperature tuning range (°C)	thickness (mm)	standard* lengths (mm)
MSHG976-0.5	976 (970 – 992)	488 (485 – 496)	5.17, 5.20, 5.23, 5.26, 5.29	30 – 110 (30 – 200)	0.5	1, 3, 5, 10, 20
MSHG1030-0.5	1030 (1024 – 1036)	515 (512 – 518)	6.16, 6.19, 6.23, 6.26, 6.29	30 – 110 (30 – 200)	0.5	1, 3, 5, 10, 20, 40
MSHG1047-0.5	1047 (1040 – 1064)	523.5 (520 – 532)	6.48, 6.52, 6.55, 6.59, 6.62	30 – 110 (30 – 200)	0.5	1, 3, 5, 10, 20, 40
MSHG1064-0.5	1064 (1058 – 1080)	532 (529 – 540)	6.83, 6.86, 6.90, 6.93, 6.96	30 – 110 (30 – 200)	0.5	0.5, 1, 3, 5, 10, 20, 40
MSHG1064-1.0	1064 (1058 – 1080)	532 (529 – 540)	6.83, 6.86, 6.90, 6.93, 6.96	30 – 110 (30 – 200)	1.0	0.5, 1, 3, 5, 10, 20, 40
MSHG1550-0.5	1530 – 1620	765 – 810	18.50, 18.80, 19.10, 19.40, 19.70, 20.00, 20.30, 20.60, 20.90	30 – 200	0.5	0.3, 0.5, 1, 3, 5, 10, 20, 40
MSHG1550-1.0	1545 – 1610	773 – 805	19.20, 19.50, 19.80, 20.10, 20.40	30 – 200	1.0	0.5, 1, 3, 5, 10, 20, 40
MSHG1650-0.5	1605 – 1720	803 – 860	20.90, 21.20, 21.50, 21.80, 22.10, 22.40, 22.70, 23.00, 23.30	30 – 200	0.5	1, 3, 5, 10, 20, 40
MSHG2100-0.5	1925 – 2250	963 – 1125	28.40, 29.00, 29.60, 30.20, 30.80, 31.40, 32.00, 32.60, 33.20	30 – 200	0.5	1, 3, 5, 10, 20, 40

*custom crystal lengths from 0.3mm to 40mm available upon request

MgO:PPLN for OPO, DFG and SFG

The wide transmission range and non-critical walk-off angle of MgO:PPLN make this material ideal for generating wavelengths throughout the mid-IR.

Based on our standard design layout, our **MgO:PPLN OPO, DFG and SFG crystals** are designed to work with common pump wavelengths at 1064nm, tunable 775nm and 1550nm. Our OPO and DFG crystals cover a broad continuous tuning range from the near-IR to beyond 4.5µm in the mid-IR, whilst our SFG crystals are designed for tunable green generation.

Our crystals undergo quality inspection and are supplied off-the-shelf. Our crystals are AR coated and clip-mounted, ready for use with our ovens and controller.

Optical Parametric Oscillation / Generation

- Widely tunable mid-IR from a 1064nm pump source †
- Also suitable for DFG
- Temperature tuning 30-200 °C
- Available in 0.5mm and 1.0mm apertures
- Mounted and triple-band AR coated

$$f_s + f_i = f_p$$

Applications

- Mid-IR spectroscopy
- Environmental monitoring
- LIDAR & laser counter measures

part #	pump (nm)	signal (nm)	idler (nm)	grating periods (µm)	thickness (mm)	standard* lengths (mm)
MOPO1-0.5	1064	1410 – 2128	2128 – 4340	27.91, 28.28, 28.67, 29.08, 29.52, 29.98, 30.49, 31.02, 31.59	0.5	1, 3, 5, 10, 20, 40
MOPO1-1.0	1064	1480 – 2128	2128 – 3785	29.52, 29.98, 30.49, 31.02, 31.59	1.0	1, 3, 5, 10, 20, 40

**custom crystal lengths from 0.3mm to 40mm available upon request*

Difference Frequency Generation

- Mixes wavelengths from a fixed 1064nm and tunable 775nm pump source for a tunable 2400 – 3000nm output
- Temperature tuning 30-200 °C
- Available in 0.5mm and 1.0mm apertures
- Mounted and triple-band AR coated

$$f_1 - f_2 = f_1 - f_2$$

Applications

- Mid-IR spectroscopy
- Environmental monitoring
- LIDAR & laser counter measures

part #	pumps (nm)	output (nm)	grating periods (µm)	thickness (mm)	standard* lengths (mm)
MDFG1-0.5	737 – 786 & 1064	2450 – 3000	18.50, 18.80, 19.10, 19.40, 19.70, 20.00, 20.30, 20.60, 20.90	0.5	5, 20, 40
MDFG2-0.5	775 – 869 & 1064	2853 – 4741	20.90, 21.20, 21.50, 21.80, 22.10, 22.40, 22.70, 23.00, 23.30	0.5	5, 20, 40

**custom crystal lengths from 0.3mm to 40mm available upon request*

Sum Frequency Generation

- Combines fixed 1550nm and tunable 780nm or 810nm pump sources to provide tunable green wavelengths
- 0.5mm apertures
- Mounted and triple-band AR coated

$$f_1 + f_2 = f_1 + f_2$$

Applications

- Cascaded THG from 1550nm
- Quantum optics

part #	pump (nm)	output (nm)	grating periods (µm)	thickness (mm)	standard* lengths (mm)
MSFG1-0.5	775 – 840 & 1550	517 – 545	6.90, 7.10, 7.30, 7.50, 7.70	0.5	1, 3, 5, 10, 20, 40

**custom crystal lengths from 0.3mm to 40mm available upon request*

Custom MgO:PPLN for R&D to high-volume OEM


Covesion poling technology provides a versatile basis for the design and manufacture of unique PPLN crystals. Our custom design and fabrication service provides application-specific technical consultation with specialist grating design and contract manufacture, resulting in a wavelength conversion solution tailored to your target laser system. We offer a range of custom design packages including:

- one-off crystals
- OEM prototyping
- Large-volume manufacture

If our stock crystals do not meet your requirements, our engineering team is available to find the best crystal solution for your interaction. Our custom fabrication service involves consultation with the customer for design of the full grating layout, mask design, wafer poling, dicing, polishing and AR coating.

Your custom crystal can be designed to have a standard Covesion multi-grating layout, so that you can continue to use our temperature control systems, or your own unique design that is customised to your OEM laser system.

We can manufacture single crystals as small as $<1\text{mm}^3$ for compact intracavity designs, or several millimetres wide aperture gratings with a long crystal length for high power applications.

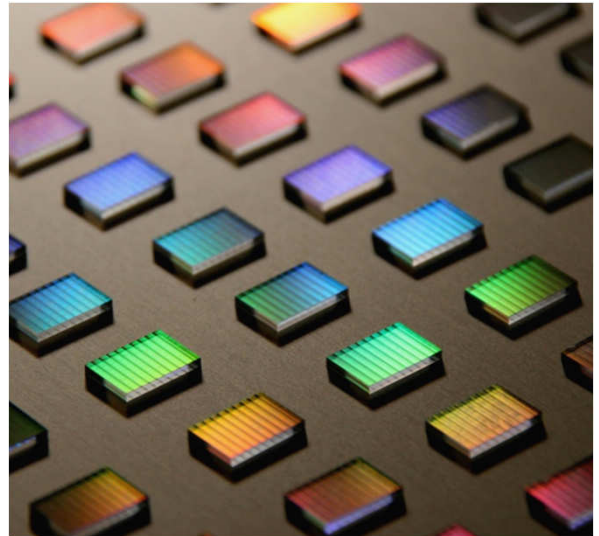

MgO:PPLN crystals as small as a grain of sugar

Mask Availability for More Specialised Interactions

Every crystal design has its own mask which is used to pattern the lithium niobate wafers. On customer request, these masks can be used to make more crystals to customised lengths and coatings. On occasion, we may have some of these more specialised crystals available in stock

Part #	pump (nm)	output (nm)	grating period range (μm)	Application
MSHG1180	1170 – 1215	585 – 608	9.20 – 10.00	Yellow-orange generation
MSFG612	1550nm & 1000 – 1025	608 – 607	10.40 – 11.00	Quantum optics
MSFG626	1051 & 1550 – 1560	618 – 628	11.12 – 11.22	Quantum optics
MSFG637	1070 & 1520 – 1590	628 – 640	11.60 – 11.80	Quantum optics
MSFG647	1550nm & 1085 – 1160	638 – 663	12.10 – 12.90	Quantum optics

MgO:PPLN Applications

Covesion PPLN devices are designed for efficient frequency conversion of lasers allowing you to reach wavelengths that cannot be achieved with conventional solid state lasers, diode lasers etc.

For example, you can use PPLN to:

- frequency double a 1064nm laser to 532nm, a technique used for green laser pointers
- convert 1064nm to 3 μ m, used for gas detection or microscopy imaging techniques
- generate a narrow linewidth laser source for targeting a specific atomic transition for laser cooling and trapping.

Alternatively, PPLN has often been used to frequency double a high power tuneable 1550nm fibre source as a low cost and compact alternative to the Ti:Sapphire laser. Such a source can be used in microscopy systems for live-cell imaging, or terahertz time-domain spectroscopy where chemical fingerprints can be identified for homeland security applications.

PPLN devices are commonly used for high power mid-IR generation in an optical parametric oscillator. Tunable mid-IR systems are used in a wide range of microscopy imaging techniques as well as spectroscopy applications for environmental imaging. With pulse energies in excess of 1mJ, these mid-IR sources are also used in the defence industry for laser countermeasures and LIDAR systems.

Our MgO:PPLN has a wide range of applications:

Femtosecond Lasers

- THz generation
- Metrology
- Frequency comb stabilization

Green Lasers

- Laser projectors
- Seabed surveying

Defence

- Laser countermeasures
- Trace gas detection
- LIDAR

Bio-Photonics




- CARS microscopy
- Fluorescence-based microscopy
- DNA sequencing

Quantum Optics

- Quantum computing
- Precision navigation systems

Aerospace

- Environmental monitoring
- Remote sensing
- Interferometry

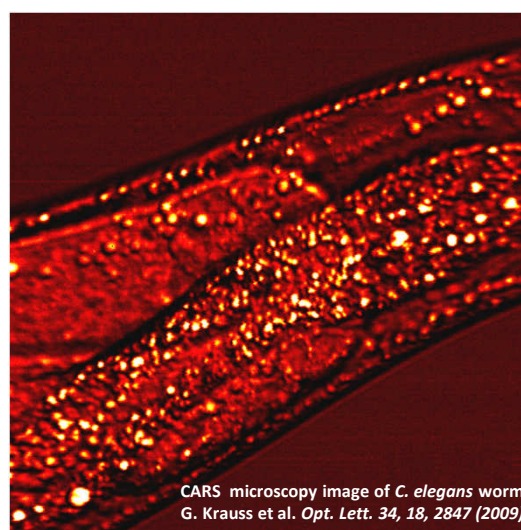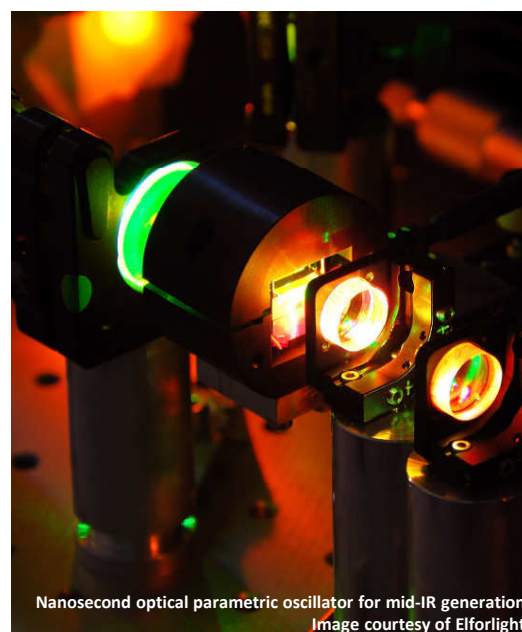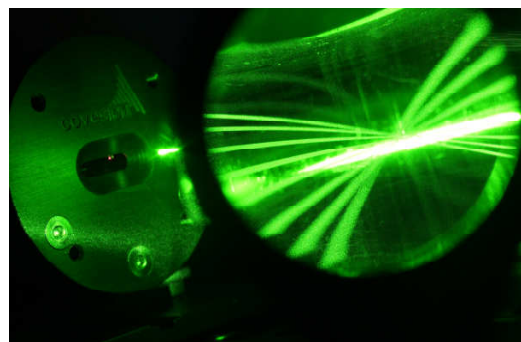

PPLN ovens, temperature controllers and accessories

Covesion's team of optical engineers have designed a range of PPLN crystal clips, ovens, temperature controllers and mounting accessories, providing a **complete PPLN system** for easy integration into your optical arrangement.

Our PPLN clips are easily mounted into the oven using the auto-locating pins. These also allow the PPLN clips to be swapped in and out with negligible realignment of the optical train.

Several sprung pins in the oven top hold the PPLN crystal clip securely in place. The oven and PPLN crystal can then be mounted in any orientation, flexible to your choice of optical arrangement.

Covesion recommends the **OC1 temperature controller** for high thermal stability of $\pm 0.01^{\circ}\text{C}$. This long-term stability can be maintained at any temperature above ambient to 200°C .



PV oven series

The **Covesion PV Oven Series** is specially designed to provide secure mounting and robust thermal stability for our PPLN crystals.

part #	crystal length	oven length	PPLN clip
PV10	1mm, 10mm	22mm	PC1, PC10
PV20	20mm	32mm	PC20
PV40	40mm	52mm	PC40

Key Features

- Auto-locating dowel pins for alignment-free insertion
- Temperature stability of $\pm 0.01^{\circ}\text{C}$ with OC1 controller
- Various mounting options available



PPLN clip kits

The **Covesion PPLN Clip Kits** provide secure mounting of our PPLN crystals. *All our crystal are supplied clip-mounted and ready for use in our ovens.*


part #	crystal length
PC1	1
PC10	10
PC20	20
PC40	40

Key Features

- Simple pin-aligned mounting in PPLN ovens
- Uniform temperature distribution
- Spring clips secure the crystal with minimal stress
- ITO coated glass for electrostatic charge dissipation

Each clip kit contains:

- a clip body
- an ITO coated cover glass
- a number of springs and screws

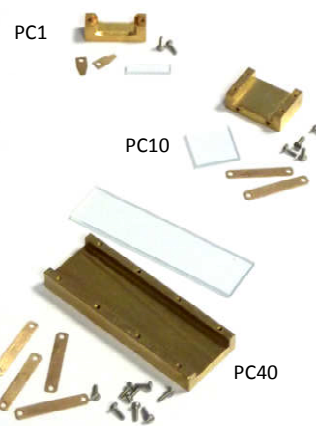


PPLN ovens, temperature controllers and accessories

OC1 temperature controller



The **Covesion OC1** temperature controller is a compact stand-alone benchtop unit for use with our PPLN oven range. The auto-detect feature provides hassle-free, plug-and-play functionality. The user can simply dial in the required temperature and allow the oven to reach optimum stability.

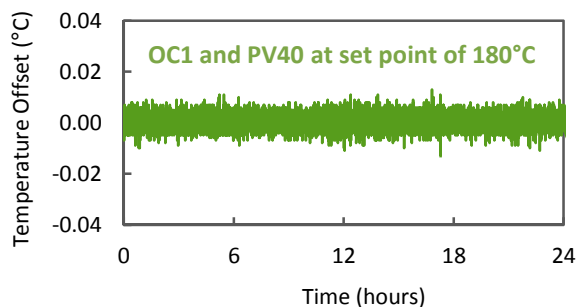

Key Features

- Simple push button interface
- Set point stability $\pm 0.01^\circ\text{C}$
- Set point resolution 0.01°C
- Maximum temperature 200°C
- High stability PID control
- Auto-detect feature for all Covesion PPLN crystal ovens

part #	control range	set point resolution	stability	for ovens	input
OC1	near-ambient to 200°C	0.01°C	$\pm 0.01^\circ\text{C}$	PV10, PV20, PV40	90 – 240V AC 50 – 60Hz

Post mount adapters

part #	description	optical height
PVP1	PV10 post mount adapter	25mm
PVP2	PV20 and PV40 post mount adapter	25mm

Compatible with standard post mounts from major optomechanics suppliers.




PPLN mounting example using PV10 and PVP1

Flexure stage adapters

- Compatible with standard flexure stages and mounts from major optomechanics suppliers
- PV oven and adapter have an optical height of 25mm above the flexure stage platform
- Riser plate, RP12.5, increases the optical height of standard flexure mounts from 12.5mm to 25mm

part #	description	optical height
PVP1R	PV10 adapter mount for flexure stages	25mm
PVP2R	PV20 and PV40 adapter mount for flexure stages	25mm
RP12.5	12.5mm riser plate for flexure stage mounts	25mm

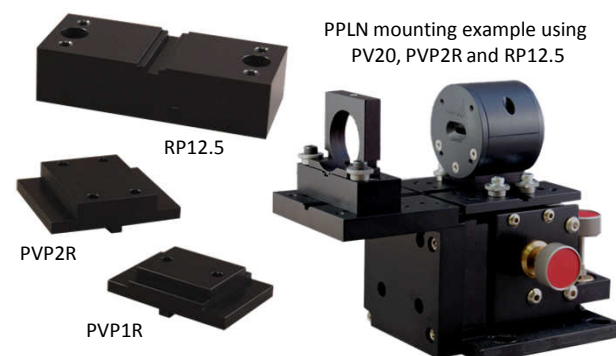

Covesion specialises in the manufacture of **periodically poled lithium niobate (PPLN)** devices, such as, **MgO-doped periodically poled lithium niobate (MgO:PPLN or PPMgO:LN)** and **undoped PPLN**. These PPLN devices are highly efficient mediums for nonlinear wavelength conversion processes, such as: second harmonic generation; difference frequency generation; sum frequency generation; optical parametric oscillation; and other second order nonlinear processes.

Principles

Second order nonlinear processes (Fig. 1) involve the mixing of three electromagnetic waves, where the magnitude of the nonlinear response of the crystal is characterized by the $\chi^{(2)}$ coefficient. Second harmonic generation (SHG), or frequency doubling, is the most common application that utilizes the $\chi^{(2)}$ properties of a nonlinear crystal. In SHG, two input pump photons with the same wavelength λ_p are combined through a nonlinear process to generate a third photon at $\lambda_{SHG} = \lambda_p/2$. Similar to SHG, sum frequency generation (SFG) combines two input photons at λ_p and λ_s to generate an output photon at λ_{SFG} with $\lambda_{SFG} = (1/\lambda_p + 1/\lambda_s)^{-1}$. Alternatively, in difference frequency generation (DFG) when two input photons at λ_p and λ_s are incident on the crystal, the presence of the lower frequency *signal* photon, λ_s , stimulates the *pump* photon, λ_p , to emit a signal photon λ_s and *idler* photon at λ_i with $\lambda_i = (1/\lambda_p - 1/\lambda_s)^{-1}$. In this process, two signal photons and one idler photon exit the crystal resulting in an amplified signal field. This is known as optical parametric amplification. Furthermore, by placing the nonlinear crystal within an optical resonator, also known as an optical parametric oscillator (OPO), the efficiency can be significantly enhanced.

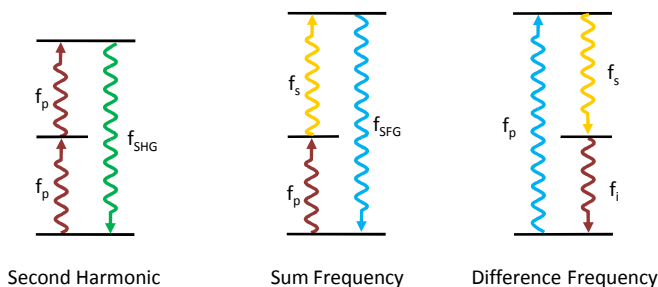


Fig. 1 Second-Order Nonlinear Interactions

Phase matching refers to fixing the relative phase between two or more frequencies of light as they propagate through the crystal. The refractive index is dependent on the frequency of light. Thus, the phase relation between two photons of different frequencies will vary as the photons propagate through the material, unless the crystal is phase matched for those frequencies. It is necessary for the phase relation between the input and generated photons to be maintained throughout the crystal for efficient nonlinear conversion of input photons. If this is not the case, the generated photons will move in and out of phase with each other in a sinusoidal manner, limiting the number of generated photons that exit the crystal. This is shown in Fig. 2. Traditional phase matching requires that the light is propagated through the crystal in a direction where the natural birefringence of the crystal matches the refractive index of the generated light. Despite providing perfect phase matching, this technique is limited to a small range of wavelengths in those materials that can be phase matched.

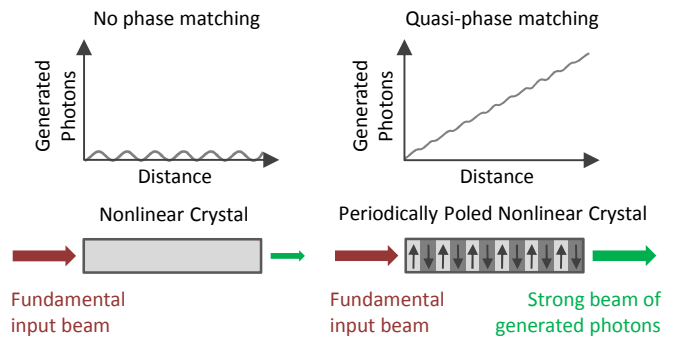


Fig. 2 Quasi-Phase Matching

PPLN is an engineered, quasi-phase-matched material. The term engineered refers to the fact that the orientation of the lithium niobate crystal is periodically inverted (poled). By inverting the crystal orientation at every peak of the sinusoidal generation, one can avoid the photons slipping out of phase with each other. As a result, the number of generated photons will grow as the light propagates through the PPLN, yielding a high conversion efficiency of input to generated photons (Fig. 2).

The period with which the crystal needs to be inverted (the poling period) depends on the interacting wavelengths and the temperature of the PPLN. For example, a PPLN crystal with a poling period of $6.6\mu\text{m}$ will efficiently generate frequency doubled photons from 1060nm photons when the crystal temperature is held at 100°C . By increasing the temperature of the crystal to 200°C the same PPLN crystal will efficiently generate frequency doubled photons from 1068.6nm wavelength photons. Thus, changing the temperature of the crystal therefore varies the phase matching conditions, allowing some tuning of the wavelength interaction.

Example uses of PPLN

Optical Parametric Oscillator:

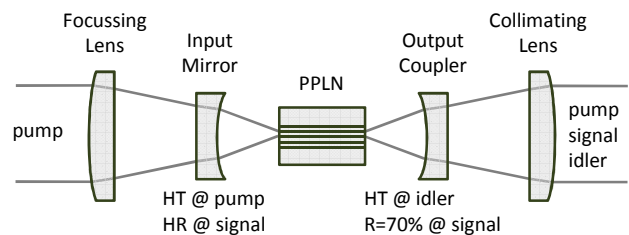


Fig. 3 Typical schematic of an OPO

One of the most common uses of PPLN is in an Optical Parametric Oscillator (OPO). A schematic of an OPO is shown in Fig. 3. The common arrangement uses a 1064nm pump laser and can produce signal and idler beams at any wavelength longer than the pump laser wavelength. The exact wavelengths are determined by two factors: energy conservation and phase matching. Energy conservation dictates that the sum of the energy of a signal photon and an idler photon must equal the energy of a pump photon. Therefore an infinite number of generated photon combinations are possible. However, the combination that will be efficiently produced is the one for which the periodicity of the

poling in the lithium niobate creates a quasi-phase matched condition. The combination of wavelengths that is quasi-phase matched, and hence referred to as the operation wavelength, is altered by changing the PPLN temperature or by using PPLN with a different poling period. Nd:YAG pumped OPOs based on PPLN can efficiently produce tunable light at wavelengths between 1.3 and 5 μ m and can even produce light at longer wavelengths but with lower efficiency. The PPLN OPO can produce output powers of several watts and can be pumped with pulsed or CW pump lasers.

Second Harmonic Generation:

PPLN is one of the most efficient crystals for frequency doubling and is well known for highly efficient green and red generation. It has been used to frequency double pulsed 1064nm beams with up to 80% conversion efficiency in a single pass pulsed system¹. In CW systems, conversion efficiencies in excess of 50% have been demonstrated in an intracavity arrangement².

How to use PPLN

Crystal length:

The crystal length is an important factor when choosing a crystal. For narrowband CW sources our longer crystal lengths, at 20 to 40mm, should give best efficiency. However, for pulsed sources, a long crystal can have a negative effect due to increased sensitivity to laser bandwidth and pulse duration. For nanosecond pulses, we typically recommend 10mm lengths and our shortest lengths at 0.5 to 1mm are ideal for femtosecond pulse systems.

Polarization:

In order to access the highest nonlinear coefficient of lithium niobate, the input light must e-polarized, i.e. the polarization must be aligned with the dipole moment of the crystal. This is accomplished by aligning the polarization axis of the light parallel to the thickness of the crystal. This applies to all nonlinear interactions.




Fig. 4 SHG requires polarization parallel to the z-axis

Focusing and the Optical Arrangement:

Since PPLN is a nonlinear material, the highest conversion efficiency from input photons to generated photons will occur when the intensity of photons in the crystal is the greatest. This is normally accomplished by coupling focused light into the center of the PPLN crystal through the end face of the crystal at normal incidence. For a particular laser beam and crystal, there is an optimum spot size to achieve optimum conversion efficiency. If the spot size is too small, the intensity at the waist is high, but the Rayleigh range is much shorter than the crystal. Therefore, the size of the beam at the input face of the crystal is large, resulting in a lower average intensity over the whole crystal length, which reduces the conversion efficiency. **A good rule of thumb is that for a CW laser beam with a Gaussian beam profile, the spot size should be chosen such that the Rayleigh range is half the length of the crystal.** The spot size can then be reduced in small

increments until the maximum efficiency is obtained. PPLN has a high index of refraction that results in a 14% Fresnel loss per uncoated surface. To increase transmission through our crystals, the crystal input and output facets are AR coated, thus reducing the reflections at each surface to less than 1%.

Temperature and Period:

The poling period of a PPLN crystal is determined by the wavelengths of light being used. The quasi-phase-matched wavelength can be tuned slightly by varying the temperature of the crystal.

Covesion's range of off-the-shelf PPLN crystals each include multiple different poling periods, which allow different wavelengths to be used at a given crystal temperature. Our calculated tuning curves give a good indication of the required temperature for phase-matching. The temperature dependence of conversion efficiency follows a sinc² function, describing a crystal *temperature acceptance bandwidth* (Fig. 5). The longer the crystal, the narrower and more sensitive the acceptance bandwidth. In many cases the efficiency of the nonlinear interaction is very sensitive to within a few degrees Celsius.

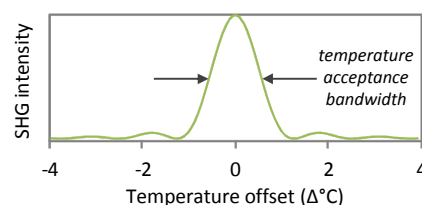


Fig. 5 SHG intensity temperature dependence for 1064nm pump in a 20mm long MgO:PPLN crystal

The optimum temperature can be determined by heating the crystal to e.g. 10°C higher than the calculated temperature and then allowing the crystal to cool whilst monitoring the output power at the generated wavelength.

The Covesion PPLN oven is easy to incorporate into an optical setup. It can be paired with Covesion's OC1 temperature controller to maintain the crystal temperature to within $\pm 0.01^\circ\text{C}$, providing highly stable output power.

MgO:PPLN vs undoped PPLN

Undoped PPLN is usually operated at temperatures between 100°C and 200°C, to minimize the photorefractive effect that can damage the crystal and cause the output beam to become distorted. Since the photorefractive effect is more severe in PPLN when higher energy photons in the visible part of the spectrum are present, it is especially important to use the crystal only in the recommended temperature range.

The addition of 5% MgO to lithium niobate significantly increases the optical and photorefractive resistance of the crystal while preserving its high nonlinear coefficient. With a higher damage threshold, MgO:PPLN is suitable for high power applications. It can also be operated from room temperature up to 200°C, significantly increasing the wavelength tunability of the device. Moreover, in some special cases, the MgO:PPLN can be operated at room temperature and without the need for temperature control.

¹ Opt. Lett. 23 (3) pp. 162-164 (1998)


² Laser Phys. 20 (7) pp. 1568-1571 (2010)

Company profile

Covesion's team of poling experts have over 15 years experience in the manufacture of PPLN for off-the-shelf, custom, and OEM customers. Featuring a comprehensive suite of proprietary technology for the design and manufacture of periodically-poled materials, Covesion continues a legacy of quality and innovation started by our parent company, Stratophase in 1999.

Our PPLN engineers have extensive knowledge in the design and build of PPLN-based laser systems for Red-Green-Blue and mid-IR applications.

Featuring a comprehensive suite of patents & know-how for the design and manufacture of periodically-poled materials, Covesion is committed at all times to the delivery of high quality functional products, achieved by investment in knowledge and technology.

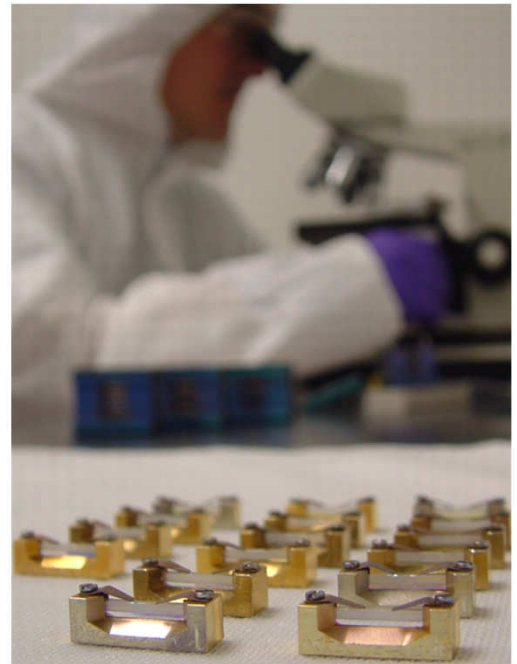

Contact us for your tailor-made wavelength conversion solution.

tel: +44 (0)1794 521 638

fax: +44 (0)8709 289 714

email: sales@covesion.com

www.covesion.com

Covesion Ltd.

Unit A7, The Premier Centre

Premier Way

Romsey

SO51 9DG

United Kingdom

Registered in England No. 06338847

VAT No. 943 1896 00

copyright © 2013 Covesion Ltd



covesion