

T620 & T62E Series

2.67Gb/s 1550nm TDM Uncooled Directly Modulated Lasers (DML) TOSA

4 Pin TO-Can Package with Receptacle

80km and 120km (LR-2 and VR-2) Service

Commercial and Industrial Operating Temperatures



The Multiplex T620 & T62E series DML TOSA module consists of an uncooled directly modulated DFB laser in a hermetically sealed metalized TO-56 package. State-of-the-art, epoxy-free laser welding is utilized. The laser module also contains an integral monitor photodiode for optical output power monitoring.

The T620G & T62EG series modules are optimized to operate at bit-rates of 2.67Gbps transmission. It's designed to be fully compliant with Telcordia GR-253-CORE OC-48 VR-2 applications up to 120km. The modules use a high performance DML platform operating at 1550nm, where fiber loss is at a minimum.

The tightly controlled design allows the device to operate over a case temperature range of -5°C to +80°C (or -40°C to +85°C for the extended temperature version).

The T620G & T62EG come with a receptacle optical connector. Other connector types may be specified as options.

Applications:

- T620G & T62EG series is designed for high-speed telecom and datacom transmissions in accordance with VR-2 SONET/SDH OC-3/STM-1, OC-12/STM-4, OC48/STM-16, Gigabit Ethernet and Fiber Channel

Features:

- Low threshold current.
- High output power.
- Low cost TO-56 package.
- Extended temperature -40°C to +85°C option available.
- High-speed design optimized for modulation at 2.67Gbps.

Compliance:

- Conforms to the requirements of the European Union Directive 2002/95/EC for the Restriction of Hazardous Substance (RoHS)

Optical and Electrical Characteristics (T=25°C, unless otherwise noted)					
PARAMETER	SYMBOL	CONDITION	MIN	MAX	UNIT
DFB Laser:					
Threshold Current	I_{th}	CW	8.0	15.0	mA
Operating Current	I_{op}		35	45	mA
Laser Forward Bias Voltage	V_{op}	CW, $P_o=2mW$		1.6	V
Peak Wavelength	λ_o	I_{op} , 2.67Gb/s, $2^{31} - 1$ PRBS NRZ modulated	1530.33	1564.68	nm
Side Mode Suppression Ratio	SMSR	CW, $P_o=2mW$, At 2.67Gb/s, $2^{31} - 1$ PRBS NRZ modulated	30	-	dB
Spectral Width (-20dB)	$\Delta\lambda$	$P_f=1.0mW$		0.12	nm
Slope Efficiency	η	CW	0.20	0.25	W/A
Bandwidth	BW	$P_o=5mW$; at -3dB	2.0		GHz
Wavelength Stability Over Temperature	$d\lambda_o/dT_c$			+0.1	nm/°C
Module:					
Operating Case Temperature	T_{case}	Standard Temperature Extended Temperature	-5 -40	80 85	°C
RF Dynamic Extinction Ratio	E_r	At 2.67Gb/s, $2^{31} - 1$ PRBS NRZ modulated	8.2	-	dB
Rise/Fall Times	t_R/t_F	$I_f=I_{th}$, $P_o=2mW$, 20%~80%		150	ps
Monitor Photodiode Current	I_m	$I_f=I_{th}+20mA$, $V_R=5V$	0.1	1.0	mA
Monitor Dark Current	I_d	$V_R=5V$		0.1	μA
Monitor Capacitance	C	$V_R=5V$, $f=1MHz$		10	pF
Optical Output Power	P_f	CW, $I_f=I_{th}+20mA$		4.0	mW
Optical Isolation	-		30	-	dB
Transmission Penalty (due to dispersion)	P_p	80km at 2.67Gb/s, $2^{31} - 1$ PRBS NRZ modulated, 1600 ps/nm dispersion. BER = 10^{-10}	-	2.0	dB
		120km at 2.67Gb/s, $2^{31} - 1$ PRBS NRZ modulated, 2400 ps/nm dispersion. BER = 10^{-10}	-	2.0	
Connector Type		LC Receptacle			

Table Notes:

1. All modules are tested to pass the SONET OC-48 eye-mask criteria.
2. Optimal thermal contact between the TOSA housing and the application heat-sink is required.

Absolute Maximum Operating Ratings

Stresses in excess of the absolute maximum ratings can cause permanent damage to the device.

Exposure to absolute maximum ratings for extended periods can adversely affect device reliability.

PARAMETER	SYMBOL	CONDITION	MIN	MAX	UNIT
Laser Diode Reverse Voltage	V_{RL}	CW	-	2	V
Laser Diode Forward Current	I_{FL}	CW	-	150	mA
Optical Output Power	P	CW	-	10	mW
Photodiode Reverse Voltage	V_{RPD}		-	20	V
Photodiode Forward Current	I_{FPD}		-	2	mA
Operating Case Temperature Range ¹	T_{Opr}	Standard Temperature Extended Temperature	-10 -45	+85 +95	°C
Storage Case Temperature Range	T_{stg}		-50	+100	°C
Storage Relative Humidity	RH			85	%
Lead Solder Temp. and Time	T	Soldering temperature 260°C		10	s

Table Notes: 1. Optimal thermal contact between the TOSA housing and the application heat-sink is required.

Ordering information:



T62	X	G	X	X	X
	Temp Range: 0= -5°C to + 80°C E= -40°C to +85°C	Data Rate: G= 2.67Gb/s	Optical Connector: R=Receptacle (LC) Other optical connector options are available upon request.	Reach: L=80km V=120km	Customized Information: A= Bare Lead (pin Type A) B= Bare Lead (pin Type B) See p.5

Coding Examples


T620GRLA uses an uncooled 1550nm DFB laser, TO-56 bare-lead package, an operating range of -5°C to + 80°C, , Data rate 2.67Gb/s, LC receptacle for an 80km application, type A pin configuration

Note – actual ordering codes may change depending on the device configuration selected as per the table above.

Mechanical

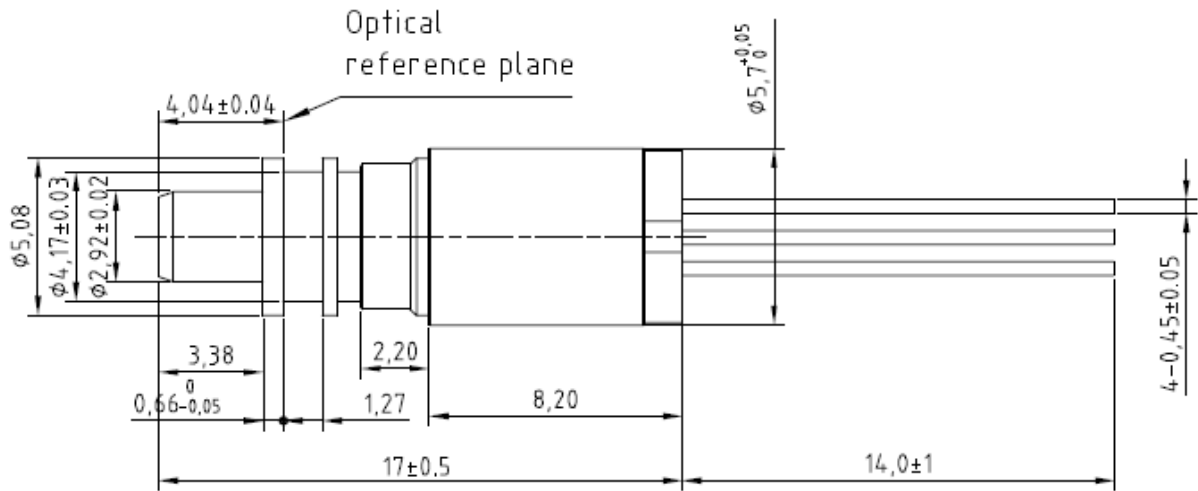


Pin Configuration



Type A

Pin Number	Pin Function (Type A)
1	LD Anode (CASE)
2	LD Cathode
3	PD Cathode
4	PD Anode



Type B

Pin Number	Pin Function (Type C)
1	CASE
2	LD Cathode
3	PD Anode
4	LD Anode / PD Cathode

WARRANTY

Multiplex warrants all standard laser products, when used within the operating limits, against defects in material and workmanship for a period of one year from date of shipment.

QUALITY

Multiplex is qualified to International Standard ISO 9001:2008.



Multiplex, Inc. 

Photonics for Communications

Multiplex, Inc.

5000 Hadley Road

South Plainfield, NJ 07080 USA

Tel: 908.757.8817 Fax: 908.769.4288

www.multiplexinc.com