
Dense Wavelength Division Multiplexer – DWDM > mux or demux, 4, 8 or 16 channels, 100 GHz




Features

- Low insertion loss.
- High channel isolation.
- Epoxy-free optical path.
- Telcordia compliant.
- 4, 8 or 16-channel DWDM configuration.

| Technical Specifications | | | | | | | |
|--------------------------------------|-------|------------------|------|------|-----------------------------------|------------|-------------|
| Parameter | | | | Unit | specifications | | |
| Channel Spacing | | | | Ch | 100 GHz | | |
| Channel Number | | | | Ch | 4 | 8 | 16 |
| Central Wavelength (λ _c) | | | | nm | C&L Bands | | |
| Passband | | | Min. | nm | ITU +/- 0.11 | | |
| Isolation | Mux | Adjacent Channel | Min. | dB | | 12 | |
| | | Non-adjacent | Min. | dB | | 12 | |
| | Demux | Adjacent Channel | Min. | dB | | 25 | |
| | | Non-adjacent | Min. | dB | | 40 | |
| Insertion Loss ¹ | | Mux | Max. | dB | 1.7 | 2.9 | 3.3 |
| | | Demux | Max. | dB | 2.0 | 3.2 | 3.5 |
| Ripple in Passband | | | Max. | dB | | 0.5 | |
| Directivity | | | Min. | dB | | 50 | |
| Polarization Dependent Loss | | | Max. | dB | 0.2 | 0.2 | 0.2 |
| Polarization Mode Dispersion | | | Max. | ps | | 0.20 | |
| Return Loss ² | | | Min. | dB | | 45 | |
| Fiber Type | | | | | Corning SMF-28 with 900 µm buffer | | |
| Fiber Length | | | Min. | m | 1.0 +/- 0.1 | | |
| Power Handling | | | Max. | mW | | 300 | |
| Operating Temperature | | | | °C | -5 to 70 | | |
| Storage Temperature | | | | °C | -40 to 85 | | |
| Package Dimension | | Length | Max. | mm | 4ch 100 | 8ch 100 | 16ch 120 |
| | | Width Height | Max. | mm | 68 | 68 12 | 80 14 |




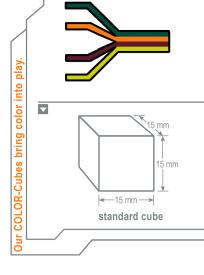



Dense Wavelength Division Multiplexer – DWDM > mux or demux, 4, 8 or 16 channels, 100 GHz



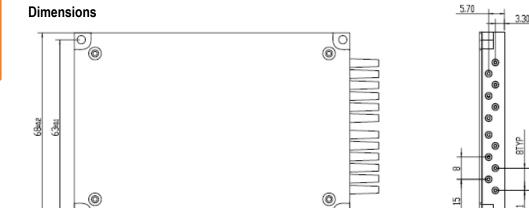




95±11

All dimensions in mm.

Ordering Information

Indicate your requirements by selecting one option from each configuration table. Please write the corresponding codes in the available boxes to form your part number. For more information on this or other products and their availability, please contact Cube Optics AG.

Ordering example: CUBO-DWDM100-04-21-A-D-S-A-33

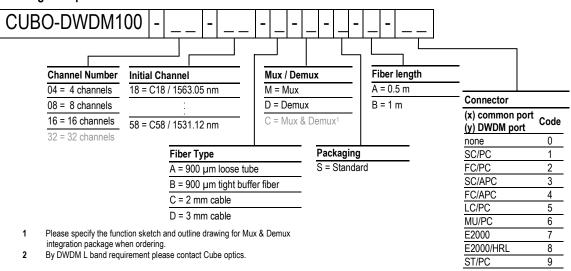

Corporate Office:

Cube Optics AG Robert-Koch-Strasse 30 55129 Mainz

Germany

Fon: +49-6131-69851-0 Fax: +49-6131-69851-79 e.mail: sales@cubeoptics.com

www.cubeoptics.com

