

NETWORK CUBE

CWDM-MUX-8+UG Module

C-1678_Rev.C

Product Description

- CWDM over WDM module for integration in 1 slot of the CUBO NETWORK CUBE WDM-Modular-Shell (C-1608).
- The module contains 2 pieces of 8 channel CWDM multiplexers (1 mux, 1 demux) and 2 pieces of Bandsplitters ("skip1")
- The bandsplitter multiplex, respectively demultiplex the 1310nm from the 1550nm band. The 1550nm port is internally connected to the 8 channel CWDM mux, respectively demux, The 1310nm ports ("Ug") are available at the front plate as an adapter for a later upgrade to connect a further 8 or 9 channel CWDM module.
- CWDM multiplexers to mux and demux 8 channels from 1471 to 1611nm; these correspond to the transceiver wavelengths from 1470 to 1610 nm.
- The CWDM multiplexers are compliant with the ITU G.694.2 standard and Telcordia GR1221 (former Bellcore) standard and are designed to meet NEBS level 3.
- The sub-system interoperates with any router, switch, DSLAM, SFP and GBIC, which supports the CWDM ITU G.694.2 standard.
- Front panel is equipped with adapters according to customer choice (see below).

- Product Description: NETWORK CUBE CWDM-MUX-8+UG Module
- Product Code: C-1678
- Connector Code: -XY (choose from table) →
- Revision Level: -Rev.C

Example Order Code: **C-1678-15-Rev.C** for a module with SC/PC on common / trunk ports, LC/PC on all CWDM channel ports and UG ports.

(X) Common ports	Code
(Y) CWDM + Ug ports	
SC/PC	1
FC/PC	2
SC/APC	3
FC/APC	4
LC/PC	5
MU/PC	6
E2000	7
E2000/HRL	8
ST/PC	9



Revision History

No	Description	Date	Created by
A	Initial release	03.12.05	Sven Krüger
B	Revised optical data	11.03.06	Thomas Paatzsch
C	Connector Code changed	01.07.09	Sven Krüger
C	Included typical insertion loss	22.03.10	Islah Touhtouh

NETWORK CUBE

CWDM-MUX-8+UG Module

C-1678_Rev.C

General Specifications

Operating Temperature	+0°C to +70°C
Storage Temperature	-40°C to +80°C
Max. optical Power	< 250 mW
Package Dimensions	Width: 166 / 182 mm, Height: 25.75 / 44 mm, Depth: 118.5 / 125.2 mm
Fiber Type	SMF-28 compatible Ø 9 / 125 / 250µm
Optical Adapters	to be selected by customer via order code

Optical Performance of each of the 2 Multiplexers (1 mux, 1 demux, incl. Ug)


Operating channel	
CWDM ports [nm]	C1=1471 C2=1491 C3=1511 C4=1531 C5=1551 C6=1571 C7=1591 C8=1611
Upgrade ports	Ug = 1271 - 1431 nm
Channel Width	
CWDM channels	>13 nm
Upgrade ("UG") channel	1263.5-1437.5 nm
Insertion Loss	max ¹ typical ²
CWDM channels	< 3.6 dB 2,5 dB
UG port	< 1.2 dB 0.9 dB
Isolation	
CWDM adjacent channel	> 30 dB
CWDM non-adjacent channel	> 40 dB
CWDM channels at Ug port	> 30 dB (Demux), > 15 dB (Mux)
UG channel at CWDM ports	> 30 dB (Demux), > 15 dB (Mux)
Isolation spectral range	1260 nm to 1620 nm
Polarization Dependent Loss	< 0.2 dB

¹ Max. insertion loss over channel bandwidth, valid over full operating temperature range and all states of polarization with optical connectors. The typical connector loss is 0.4 dB for a pair of connectors.

² Typical insertion loss is defined as typical value over channel bandwidth, full operating temperature range and all states of polarization including optical connectors. Typical values have been derived with statistical methods from actual production data to reflect the majority of cases.


Package Dimensions and Front Plate design

Logical setup

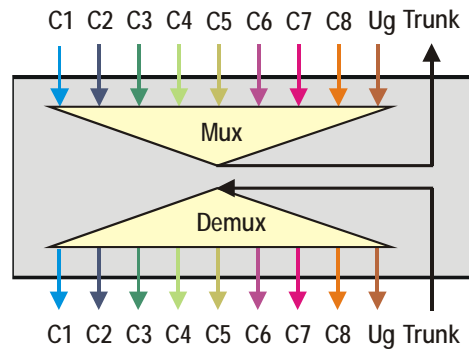

Connection Scheme

- The module contains the adapters for one multiplexer (C1-C8, Ug) at the top and one demultiplexer (C1-C8, Ug) at the bottom.
- The channels are marked with "1470", "1490", "1510", "1530", "1550", "1570", "1590" and "1610" corresponding to the 8 corresponding transceiver wavelengths, respectively as "Ug" for the upgrade port.
- The common ports are marked as "Trunk".

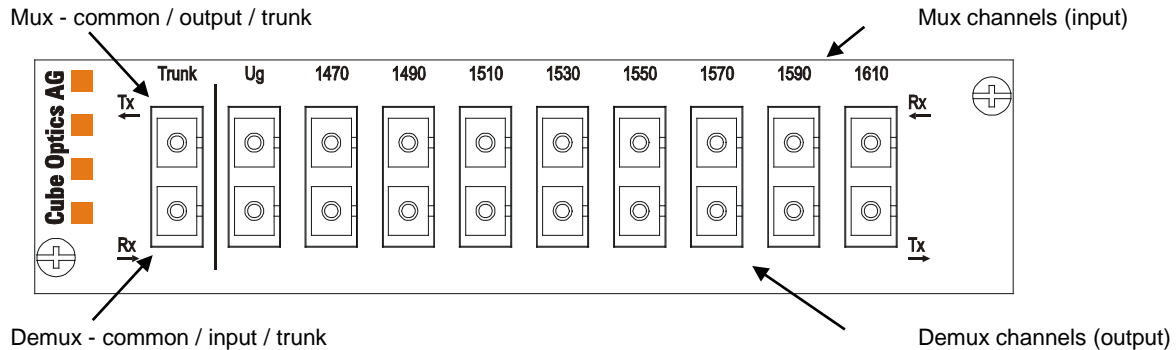

Please note, that the actual layout depends on the chosen connector type as well as other factors. However, the principal scheme stays the same.




NETWORK CUBE

CWDM-MUX-8+UG Module

C-1678_Rev.C

Layout and dimensions

- Width: 166 / 182 mm
- Height: 25.75 / 44 mm
- Depth: 118.5 / 125.2 mm
- The color of the module is light gray
- All fonts and labels are printed in black.

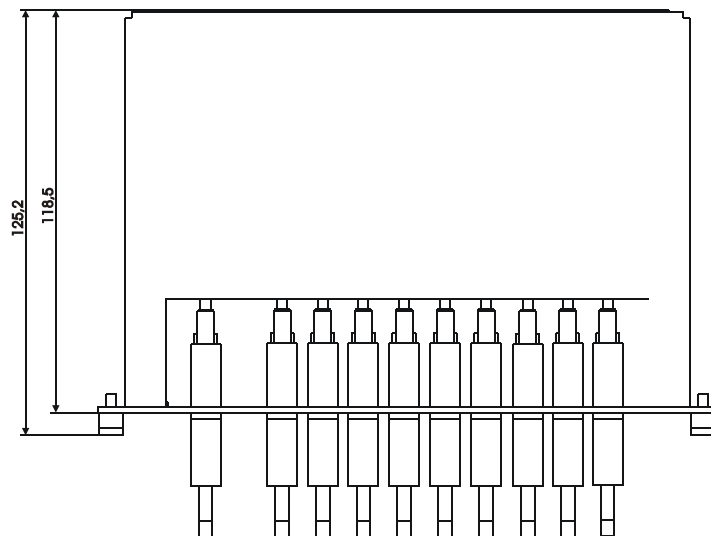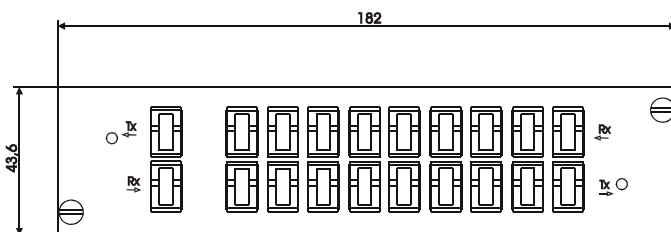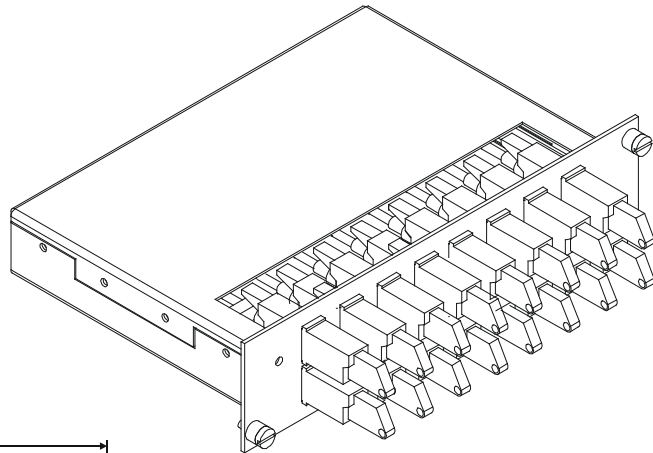

Please note, that the drawings shown here only show the dimensions and do not the specific configuration of the module!

HUBER+SUHNER Cube Optics AG
is certified according to ISO 9001.

WAIVER

It is exclusively in written agreements that we provide our customers with warrants and representations as to the technical specifications and/or the fitness for any particular purpose. The facts and figures contained herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only.

HUBER+SUHNER Cube Optics AG
Robert-Koch-Strasse 30
55129 Mainz
Germany

phone: +49-6131-69851-0
fax: +49-6131-69851-79
sales.cubo@hubersuhner.com

www.hubersuhner.com
www.cubeoptics.com