

GHR-3G-xxx

3Gbps Video SFP Optical Receiver, PIN photodetector

Features

- ◆ HD-SDI SFP Receiver available
- ◆ SD-SDI SFP Receiver available
- ◆ 3G-SDI SFP Receiver available
- ◆ SMPTE 297-2006 Compatible
- ◆ Metal enclosure for Lower EMI
- ◆ PIN photodetector
- ◆ Supports video pathological patterns for SD-SDI, HD-SDI and 3G-SDI
- ◆ Digital Diagnostic functions available through the I2C interface
- ◆ Compatible with RoHS
- ◆ +3.3V single power supply
- ◆ Operating case temperature:
Standard : 0 to +70°C



Applications

- ◆ SMPTE 297-2006 Compatible Electrical-to-Optical Interfaces.
- ◆ HDTV/SDTV Service Interfaces.

Description

The video series transceivers are high performance, cost effective modules for duplex video transmission application over single mode fiber.

The receiver is designed to receive data rates from 50Mbps to 2.97Gbps and is specifically designed for robust performance in the presence of SDI pathological patterns for SMPTE 259M, SMPTE 344M, SMPTE 292M and SMPTE 424M serial rates. The module is fully compliant with

SMPTE 297M-2006.

The receiver is consists of a PIN photodiode integrated with a trans-impedance preamplifier (TIA). All modules satisfy class I laser safety requirements.

Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit
Supply Voltage	Vcc	-0.5	4.5	V
Storage Temperature	Ts	-40	+85	°C
Operating Humidity	-	5	85	%

Recommended Operating Conditions

Parameter	Symbol	Min	Typical	Max	Unit
Operating Case Temperature	Tc	0		+70	°C
					°C
Power Supply Voltage	Vcc	3.13	3.3	3.47	V
Power Supply Current	Icc			150	mA
Data Rate			3		Gbps

Optical and Electrical Characteristics

Parameter	Symbol	Min	Typical	Max	Unit	Notes
Receiver						
Rise/Fall Time (20%~80%)	SD-SDI	tr/ff		1500	ps	1
	HD-SDI			270		
	3G-SDI			135		
Total Output Jitter	PRBS and colour bar	SD-SDI	70	200	ps	
		HD-SDI	50	135		
		3G-SDI	70	100		
	pathological	SD-SDI	200	300		

		HD-SDI			115		
		3G-SDI			120		
Centre Wavelength		λ_c	1260		1580	nm	
Receiver Sensitivity (PRBS)	SD-SDI				-22	dBm	
	HD-SDI				-22	dBm	
	3G-SDI				-22	dBm	
Receiver Sensitivity (Pathological)	SD-SDI				-20	dBm	
	HD-SDI				-22	dBm	
	3G-SDI				-22	dBm	
Receiver Overload			0			dBm	3
LOS De-Assert		LOS_D				dBm	
LOS Assert		LOS_A				dBm	
LOS Hysteresis						dB	
Data Output Swing Differential		Vout	650	800	1000	mV	2
LOS	High		2.0		Vcc	V	
	Low				0.8	V	


Notes:

1. Rise and fall times, 20% to 80%, are measured following a fourth-order Bessel-Thompson filter with a bandwidth of 0.75 x clock frequency corresponding to the serial data rate
2. PECL input, internally AC-coupled and terminated.
3. Internally AC-coupled.

Pin Definitions


Pin Diagram

Top of Board

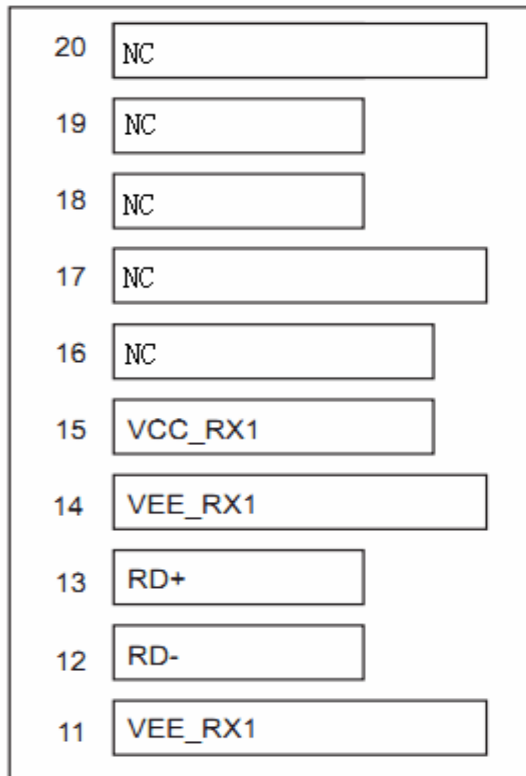

Bottom of Board

(as viewed through top of board)

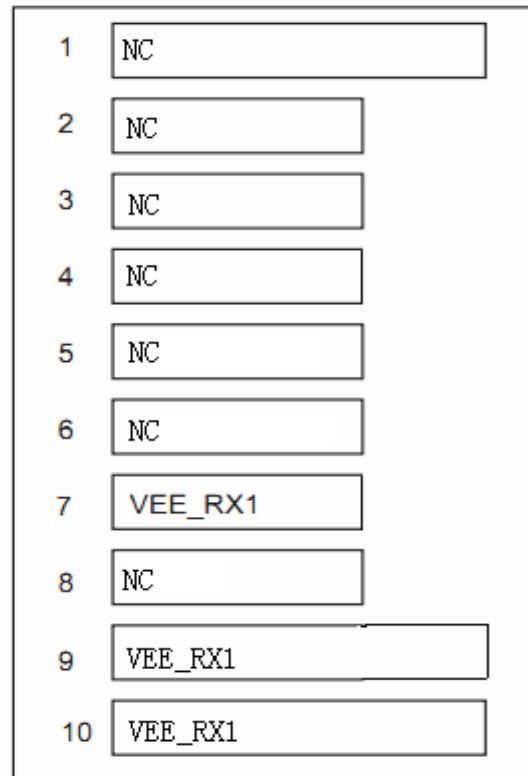

Pin Descriptions

Pin	Signal Name	Description	Plug Seq.	Notes
1	NC	Not Connected	1	
2	NC	Not Connected	3	
3	NC	Not Connected	3	
4	NC	Not Connected	3	
5	NC	Not Connected	3	


6	NC	Not Connected	3	
7	VEE_RX1	Receiver1 Ground	3	
8	NC	Not Connected	3	
9	VEE_RX1	Receiver1 Ground	1	
10	VEE_RX1	Receiver1 ground	1	
11	VEE_RX1	Receiver1 ground	1	
12	RD-	Inv. Received Data Out	3	Note 1
13	RD+	Received Data Out	3	Note 1
14	VEE_RX1	Receiver1 ground	1	
15	VCC_RX1	Receiver1 Power Supply	2	
16	NC	Not Connected	2	
17	NC	Not Connected	1	
18	NC	Loss of Signal	3	
19	NC	Not Connected	3	
20	NC	Not Connected	1	

Notes:

Plug Seq.: Pin engagement sequence during hot plugging.

- 1) RD-/+ : These are the differential receiver outputs. They are internally AC-coupled 100 differential lines which should be terminated with 100Ω (differential) at the user SERDES.

Mechanical Dimensions

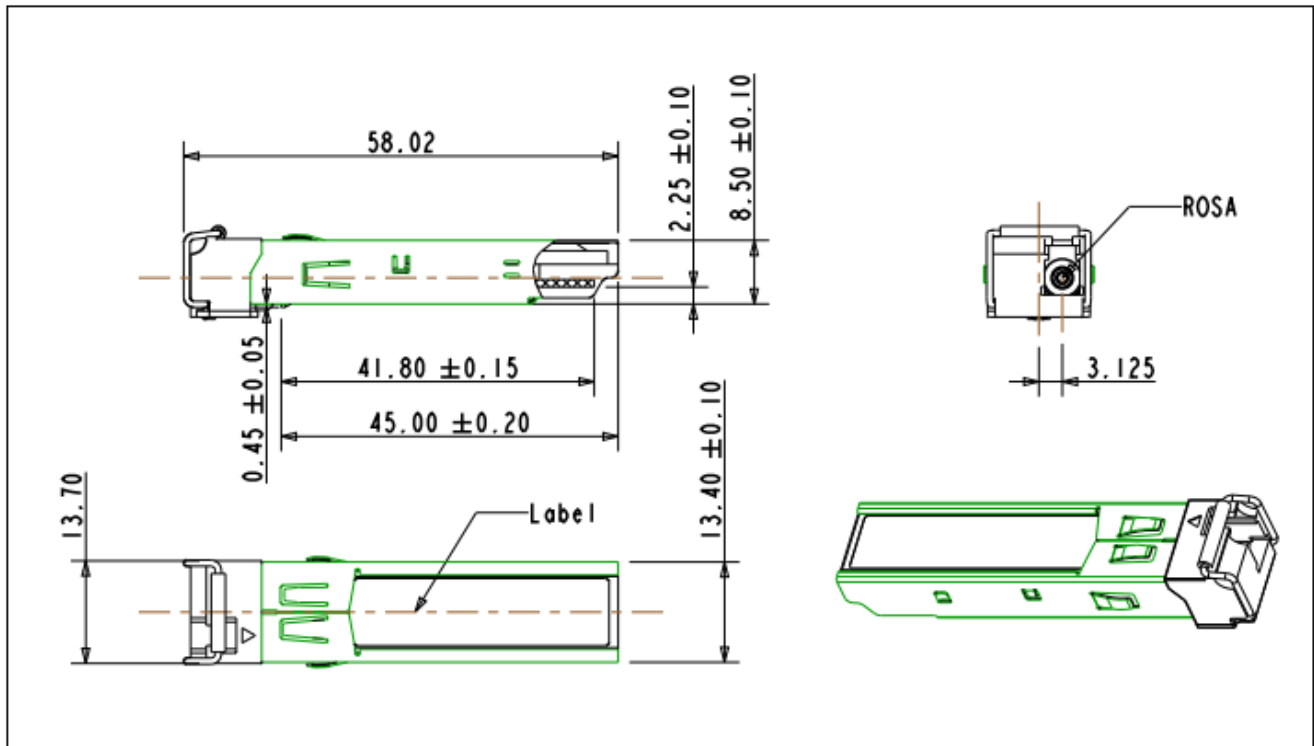

Ordering information

Part Number	Product Description
GHR-3G-XXC	PIN, 3Gbps, 0°C ~ +70°C, No With Digital Diagnostic Monitoring

Important Notice

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by GIGALIGHT before they become applicable to any particular order or contract. In accordance with the GIGALIGHT policy of continuous improvement specifications may change without notice.



深圳市易飞扬通信技术有限公司
SHENZHEN GIGALIGHT TECHNOLOGY CO.,LTD

[Http:// www.gigalight.com.cn](http://www.gigalight.com.cn)

Optical Network Transceiver Innovator

The publication of information in this data sheet does not imply freedom from patent or other protective rights of GIGALIGHT or others. Further details are available from any GIGALIGHT sales representative.

sales@gigalight.com.cn

<http://www.gigalight.com.cn>