

## GIGALIGHT 10Gb/s 1550nm XENPAK ZR Transponder GXK-55192-ZRC

### Features

- ◆ XENPAK MSA Compliant
- ◆ 70-PIN connector
- ◆ SC duplex receptacle package
- ◆ Cooled EA-DFB/APD-PD
- ◆ Power supply: +5.0 V, +3.3 V, APS:+1.2 V
- ◆ Power Dissipation 4W Maximum
- ◆ 0°C to 70°C Operating Case Temperature
- ◆ Digital Diagnostic Monitoring
- ◆ Management and control with MDIO 2-wire bus
- ◆ XAUI electrical interface 4 x 3.125 Gb/s Ethernet
- ◆ ≤80km ER 10GBE
- ◆ RoHS6 compliant and lead free 



### Applications

- ◆ 10 Gb/s Ethernet transmission systems

### Absolute Maximum Ratings

| Parameter                    | Symbol | Min | Max | Unit |
|------------------------------|--------|-----|-----|------|
| Supply Voltage+5V            | Vcc5   |     | 6.0 | V    |
| Supply Voltage_3.3V          | Vcc3   |     | 4   | V    |
| Supply Voltage APS           | Vaps   |     | 2   | V    |
| Storage Temperature          | Tst    | -20 | 85  | °C   |
| Optical Input Received Power | PIN    | -   | -7  | dBm  |

## Operating Conditions

| Parameter                  | Symbol | Min  | Typical | Max  | Unit |
|----------------------------|--------|------|---------|------|------|
| Operating Case temperature | Tca    | 0    | -       | 70   | °C   |
| Supply Voltage+5V          | Vcc5   | 4.75 | 5       | 5.25 | V    |
| Supply Current+5V          | Icc5   |      |         | 500  | mA   |
| Supply Voltage_3.3V        | VCC3   | 3.14 | 3.3     | 3.47 | V    |
| Supply Current+3.3V        | Icc3   |      |         | 1000 | mA   |
| Supply Voltage APS         | Vaps   | 1.14 | 1.2     | 1.26 | V    |
| Supply Current APS         | Iaps   |      |         | 1100 | mA   |
| Module Power Dissipation   | Pm     | -    |         | 4    | W    |

## Transmitter Specifications – Optical

| Parameter                         | Symbol                 | Min    | Typical     | Max    | Unit |
|-----------------------------------|------------------------|--------|-------------|--------|------|
| Center Wavelength                 | $\lambda_c$            | 1464.5 |             | 1617.5 | nm   |
| Center wavelength stability       | $\Delta\lambda_D$      | -6.5   | $\lambda_c$ | 6.5    | nm   |
| Optical Transmit Power            | Po                     | 0      |             | 4      | dBm  |
| Optical Transmit Power (disabled) | Ptx-dis                | -      | -           | -40    | dBm  |
| Extinction Ratio                  | ER                     | 9      |             | -      | dB   |
| Side Mode Suppression Ratio       | SMSR                   | 30     | -           | -      | dB   |
| Eye Mask                          | IEEE 802.3ae Compliant |        |             |        |      |

## Transmitter Specifications – Electrical

| Parameter                     | Symbol  | Min | Typical | Max  | Unit     |
|-------------------------------|---------|-----|---------|------|----------|
| Data Rate (TXLINE0-3)         | TX-xaui | -   | 3125    | -    | Mbps     |
| Differential impedance        | Zo      | 80  | 100     | 120  | $\Omega$ |
| Differential Input Amplitude  | Vin P-P | 160 | -       | 2000 | mVpp     |
| Input Rise/Fall               | TR / TF | 60  | -       | 130  | ps       |
| Differential Impedance of Zin | Zin     | -   | 100     | -    | ohm      |

## Receiver Specifications – Optical

| Parameter                  | Symbol      | Min  | Typical | Max  | Unit |
|----------------------------|-------------|------|---------|------|------|
| Input Operating Wavelength | $\lambda$   | 1260 | -       | 1600 | nm   |
| Received power 1           | Rpo         | -24  | -       | -7   | dBm  |
| Maximum Input Power        | RX-overload | -7   | -       | -    | dBm  |
| Reflectance                | Rrx         | -    | -       | -27  | dB   |

## Receiver Specifications – Electrical

| Parameter                      | Symbol   | Min  | Typical | Max  | Unit |
|--------------------------------|----------|------|---------|------|------|
| Data Rate (TXLINE0-3)          | RX-xaui  |      | 3125    |      | Mbps |
| Supply Voltage                 | VccRX    | 3.13 | 3.3     | 3.47 | V    |
| Differential Output Amplitude  | Vout P-P | 800  | -       | 1600 | mV   |
| Rise/Fall Time                 | Tr / Tf  | 50   | -       | 90   | ps   |
| Differential Impedance of Zout | Zout     | -    | 100     | -    | ohm  |

## Signal Specifications – Electrical

| Parameter                   | Symbol   | Min  | Typ | Max  | Units |
|-----------------------------|----------|------|-----|------|-------|
| 1.2 V CMOS                  |          |      |     |      |       |
| Input High Voltage          | VIL(MAX) | -    | -   | 0.36 | V     |
| Input Low Voltage           | VIH(MIN) | 0.84 | -   | 1.25 | V     |
| Capacitance                 |          | -    | -   | 320  | pF    |
| Pull Up Resistance          | Rpull    | 10k  | -   | 22k  | ohm   |
| MDIO I/O                    |          |      |     |      |       |
| Output Low Voltage          | VOL      | -0.3 | -   | 0.2  | V     |
| Output Low Current          | IOL      | -    | -   | 4    | mA    |
| Input High Voltage          | VIH      | 0.84 | -   | 1.5  | V     |
| Input Low Voltage           | VIL      | -0.3 | -   | 0.36 | V     |
| Pull-up Supply Voltage      | VPULL    | 1.14 | 1.2 | 1.26 |       |
| Input Capacitance           | CIN      | -    | -   | 10   | Pf    |
| Load Capacitance            | CLOD     | -    | -   | 470  | Pf    |
| External Pull-up Resistance | EPULL    | 200  | -   | -    | Ohm   |

## Pin Definitions


| Pin No | Name          | Dir | Function                                                                                                                                        | Notes |
|--------|---------------|-----|-------------------------------------------------------------------------------------------------------------------------------------------------|-------|
| 1      | GND           |     | Electrical Ground                                                                                                                               | 1     |
| 2      | GND           |     | Electrical Ground                                                                                                                               | 1     |
| 3      | GND           |     | Electrical Ground                                                                                                                               | 1     |
| 4      | 5.0V          |     | Power                                                                                                                                           | 2     |
| 5      | 3.3V          |     | Power                                                                                                                                           | 2     |
| 6      | 3.3V          |     | Power                                                                                                                                           | 2     |
| 7      | APS =1.2V     |     | Adaptive Power Supply                                                                                                                           | 2     |
| 8      | APS =1.2V     |     | Adaptive Power Supply                                                                                                                           | 2     |
| 9      | LASI          |     | Open Drain Compatible<br>10K-22K pull up on host.<br>Logic High: Normal Operation<br>Logic Low: LASI Asserted                                   | 4     |
| 10     | RESET         | I   | Open Drain compatible.<br>10-22K pull-up on transceiver<br>Logic high = Normal operation<br>Logic low = Reset<br>Minimum reset assert time 1 ms | 4     |
| 11     | VEND SPECIFIC |     | Vendor Specific Pin.<br>Leave unconnected when not in use.                                                                                      | 8     |
| 12     | TX ON/OFF     | I   | Open Drain compatible.<br>10-22K pull-up on transceiver<br>Logic high = Transmitter On (capable)<br>Logic low = Transmitter Off (always)        | 4     |
| 13     | RESERVED      |     | Reserved                                                                                                                                        | 4     |
| 14     | MOD DETECT    | O   | Pulled low inside module through 1k                                                                                                             |       |
| 15     | VEND SPECIFIC |     | Vendor Specific Pin.<br>Leave unconnected when not in use.                                                                                      | 8     |
| 16     | VEND SPECIFIC |     | Vendor Specific Pin.<br>Leave unconnected when not in use.                                                                                      | 8     |
| 17     | MDIO          | I/O | Management Data IO                                                                                                                              | 4, 5  |
| 18     | MDC           | I   | Management Data Clock                                                                                                                           | 4, 5  |
| 19     | PRTAD4        | I   | Port Address Bit 4 (Low = 0)                                                                                                                    | 4     |
| 20     | PRTAD3        | I   | Port Address Bit 3 (Low = 0)                                                                                                                    | 4     |
| 21     | PRTAD2        | I   | Port Address Bit 2 (Low = 0)                                                                                                                    | 4     |
| 22     | PRTAD1        | I   | Port Address Bit 1 (Low = 0)                                                                                                                    | 4     |
| 23     | PRTAD0        | I   | Port Address Bit 0 (Low = 0)                                                                                                                    | 4     |
| 24     | VEND SPECIFIC |     | Vendor Specific Pin.<br>Leave unconnected when not in use.                                                                                      | 8     |
| 25     | APS SET       |     | Feedback input for APS                                                                                                                          |       |
| 26     | RESERVED      |     | Reserved for Avalanche Photodiode use.                                                                                                          | 8     |
| 27     | APS SENSE     |     | APS Sense Connection                                                                                                                            |       |

|    |           |   |                            |   |
|----|-----------|---|----------------------------|---|
| 28 | APS =1.2V |   | Adaptive Power Supply      | 2 |
| 29 | APS =1.2V |   | Adaptive Power Supply      | 2 |
| 30 | 3.3V      |   | Power                      | 2 |
| 31 | 3.3V      |   | Power                      | 2 |
| 32 | 5.0V      |   | Power                      | 2 |
| 33 | GND       |   | Electrical Ground          | 1 |
| 34 | GND       |   | Electrical Ground          | 1 |
| 35 | GND       |   | Electrical Ground          | 1 |
| 36 | GND       |   | Electrical Ground          | 1 |
| 37 | GND       |   | Electrical Ground          | 1 |
| 38 | RESERVED  |   | Reserved                   |   |
| 39 | RESERVED  |   | Reserved                   |   |
| 40 | GND       |   | Electrical Ground          | 1 |
| 41 | RX LANE0+ | O | Module XAUI Output Lane 0+ | 7 |
| 42 | RX LANE0- | O | Module XAUI Output Lane 0- | 7 |
| 43 | GND       |   | Electrical Ground          | 1 |
| 44 | RX LANE1+ | O | Module XAUI Output Lane 1+ | 7 |
| 45 | RX LANE1- | O | Module XAUI Output Lane 1- | 7 |
| 46 | GND       |   | Electrical Ground          | 1 |
| 47 | RX LANE2+ | O | Module XAUI Output Lane 2+ | 7 |
| 48 | RX LANE2- | O | Module XAUI Output Lane 2- | 7 |
| 49 | GND       |   | Electrical Ground          | 1 |
| 50 | RX LANE3+ | O | Module XAUI Output Lane 3+ | 7 |
| 51 | RX LANE3- | O | Module XAUI Output Lane 3- | 7 |
| 52 | GND       |   | Electrical Ground          | 1 |
| 53 | GND       |   | Electrical Ground          | 1 |
| 54 | GND       |   | Electrical Ground          | 1 |
| 55 | TX LANE0+ | I | Module XAUI Input Lane 0+  | 7 |
| 56 | TX LANE0- | I | Module XAUI Input Lane 0-  | 7 |
| 57 | GND       |   | Electrical Ground          | 1 |
| 58 | TX LANE1+ | I | Module XAUI Input Lane 1+  | 7 |
| 59 | TX LANE1- | I | Module XAUI Input Lane 1-  | 7 |
| 60 | GND       |   | Electrical Ground          | 1 |
| 61 | TX LANE2+ | I | Module XAUI Input Lane 2+  | 7 |
| 62 | TX LANE2- | I | Module XAUI Input Lane 2-  | 7 |
| 63 | GND       |   | Electrical Ground          | 1 |


|    |           |   |                           |   |
|----|-----------|---|---------------------------|---|
| 64 | TX LANE3+ | I | Module XAUI Input Lane 3+ | 7 |
| 65 | TX LANE3- | I | Module XAUI Input Lane 3- | 7 |
| 66 | GND       |   | Electrical Ground         | 1 |
| 67 | RESERVED  |   | Reserved                  |   |
| 68 | RESERVED  |   | Reserved                  |   |
| 69 | GND       |   | Electrical Ground         | 1 |
| 70 | GND       |   | Electrical Ground         | 1 |

Notes:


- 1) Ground connections are common for TX and RX.
- 2) All connector contacts are rated at 0.5A nominal.
- 4) 1.2V CMOS compatible.
- 5) MDIO and MDC timing must comply with IEEE802.3ae, Clause 45.3
- 7) XAUI output characteristics should comply with IEEE802.3ae Clause 47.
- 8) Transceivers will be MSA compliant when no signals are present on the vendor specific pins.

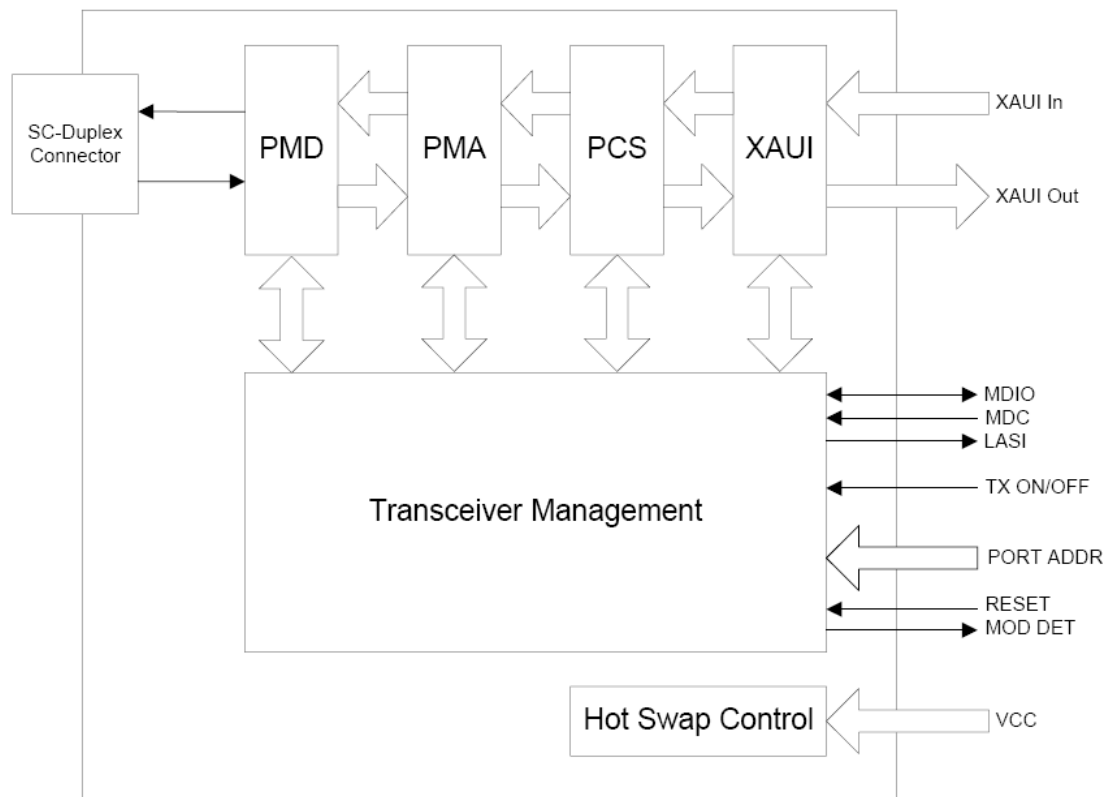

**Figure1.** Functional Diagram of Typical XENPAK Style Transceiver

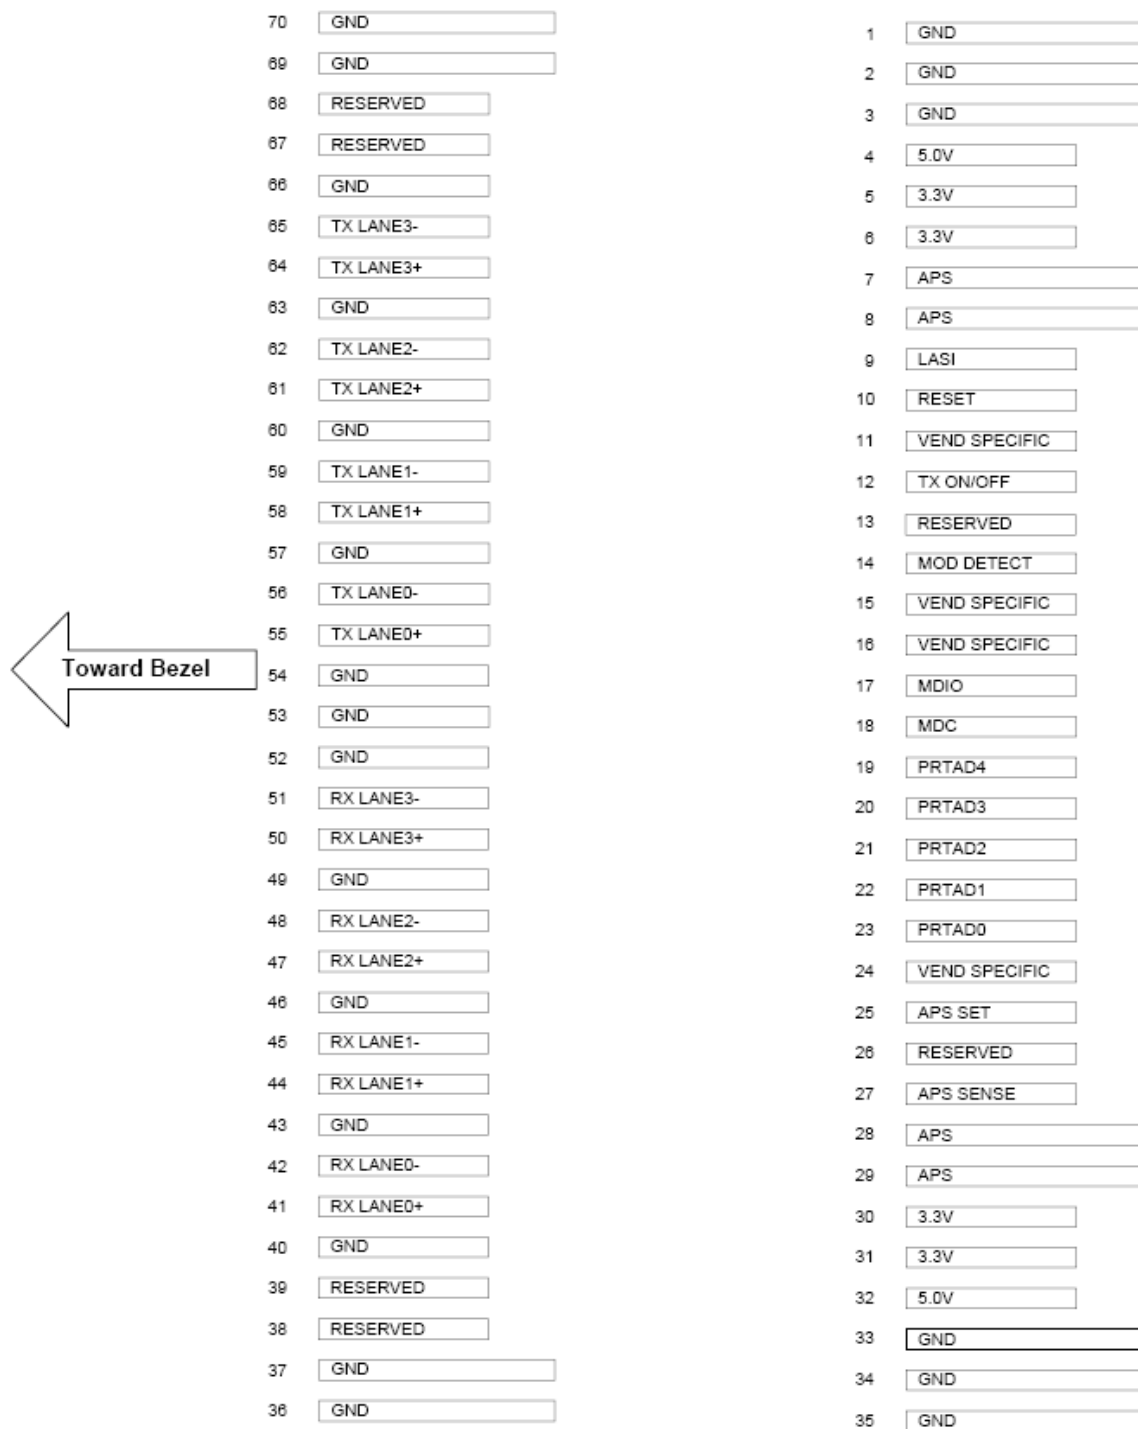

**Figure2.**Electrical Pin-out Details

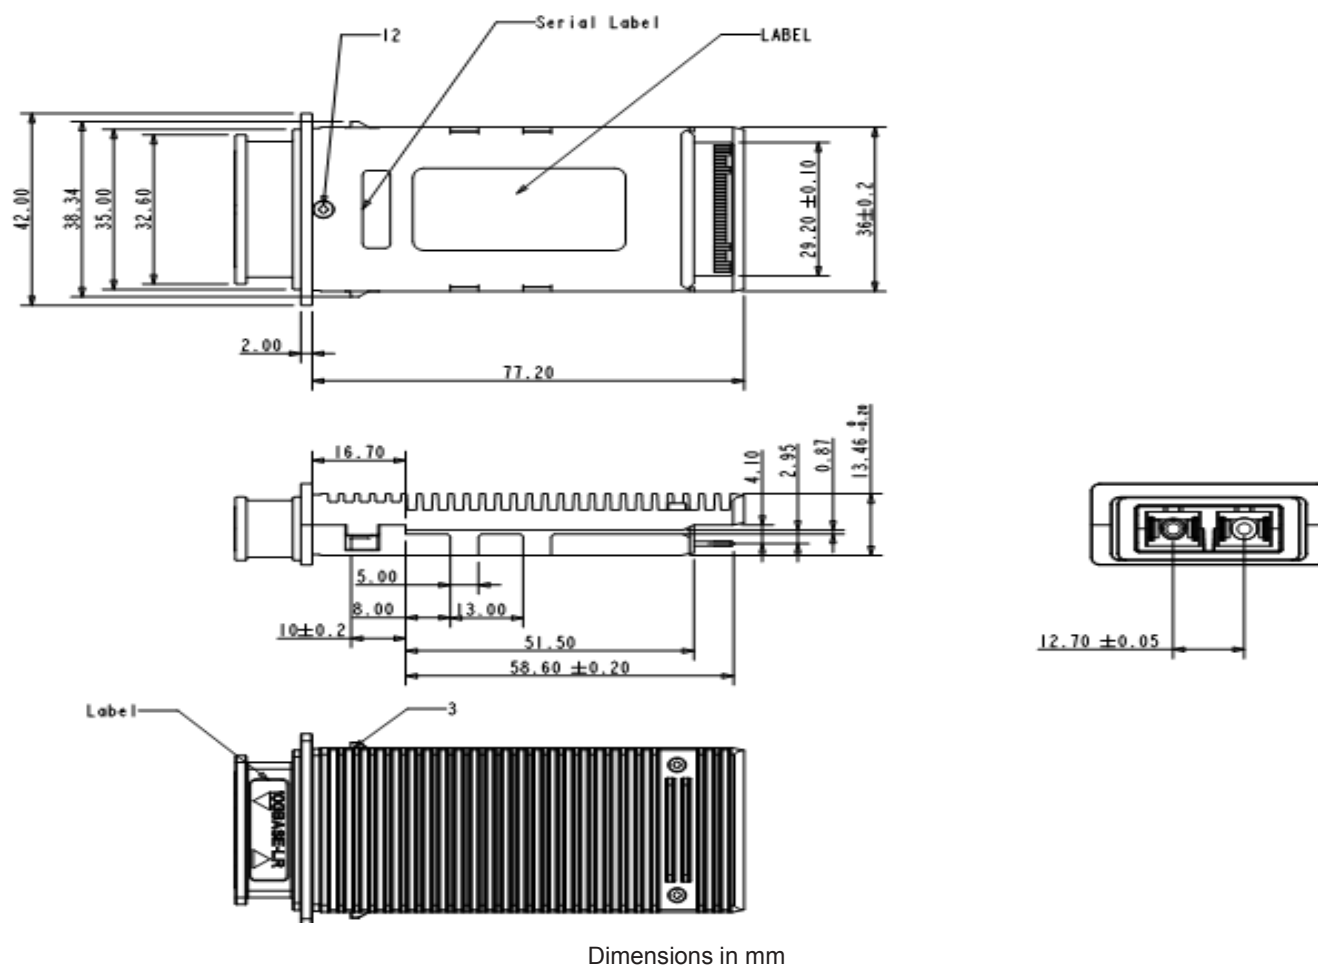

**Figure3.** Mechanical Dimensions

## Regulatory Compliance

GIGALIGHT XENPAK Transponder is designed to be Class I Laser safety compliant and is certified per the following standards:

| Feature                  | Agency | Standard                                            | Certificate / Comments |
|--------------------------|--------|-----------------------------------------------------|------------------------|
| Laser Safety             | FDA    | CDRH 21 CFR 1040 and Laser Notice No. 50            | 1120291-000            |
| Product Safety           | UL     | UL and CUL EN60950-2:2007                           | WT10093765-D-E-E       |
| Environmental protection | SGS    | RoHS Directive 2002/95/EC                           | GZ1001008706/CHEM      |
| EMC                      | WALTEK | EN 55022:2006+A1:2007<br>EN 55024:1998+A1+A2:2003 - | WT10093768-D-E-E       |

## Ordering information

| Part Number   | Product Description                             |
|---------------|-------------------------------------------------|
| GXK-55192-ZRC | XENPAK, 80km(ZR), 0°C ~ 70°C, Cooled EA-DFB/APD |

## References

- ◆ 10G Ethernet ZR
- ◆ IEEE 802.3 ae
- ◆ XENPAK MSA

## Important Notice

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by GIGALIGHT before they become applicable to any particular order or contract. In accordance with the GIGALIGHT policy of continuous improvement specifications may change without notice.

The publication of information in this data sheet does not imply freedom from patent or other protective rights of GIGALIGHT or others. Further details are available from any GIGALIGHT sales representative.

[sales@gigalight.com.cn](mailto:sales@gigalight.com.cn)  
<http://www.gigalight.com.cn>