

Fused Coupler

> 1x4 to 1x32, multi mode, wide band

Features

- Low Insertion loss
- Excellent uniformity
- Wide variety of configurations
- Environmentally stable and reliable


Applications

- Test equipment
- Local Area Networks (LAN)
- Optical fiber sensors
- Video Networks

Specifications

<i>Multi Mode, Star and Tree Coupler</i>							
Parameter	1x4	4x4	1x8	8x8	1x16	16x16	1x32
Operating Wavelength (nm)	850 & 1310 (others on request)						
Coupling ratio (%)	Average						
Insertion Loss (dB)	7.7	8.4	11.5	12.5	15.5	17.0	18.0
Uniformity (dB)	≤ 0.8	≤ 1.0	≤ 1.2	≤ 1.4	≤ 2.4	≤ 2.6	≤ 2.6
Directivity (dB)	>35						
Operation temp. (°C)	-40 to +70						
Storage temp. (°C)	-50 to +85						
Temp. Coefficient (dB/°C)	<0.003		<0.004		<0.006		
Dimensions (mm)	ABS box	100(L)x80(W)x10(H)		140(L)x90(W)x10.7(H)			
	Metal box	LGX Module 19" 1U Chassis		LGX Module or 19" 1U Chassis		LGX Module 19" 1U Chassis 19" 2U Chassis	
** The specifications listed above do not include the effect of connector loss.							
** Connector Type: SC, FC, ST, LC, MU are available.							
** Specification values for devices with unbalanced split ratios are available upon request.							






Fused Coupler

> 1x4 to 1x32, multi mode, wide band

Ordering Information

Indicate your requirements by selecting one option from each configuration table. Please write the corresponding codes in the available boxes to form your part number. For more information on this or other products and their availability, please contact Cube Optics AG at +49-6131-69851-0 or via e.mail at sales@cubeoptics.com, or visit our website at www.cubeoptics.com.

Ordering example: MM-5-P-4-M-XX-O-2-55

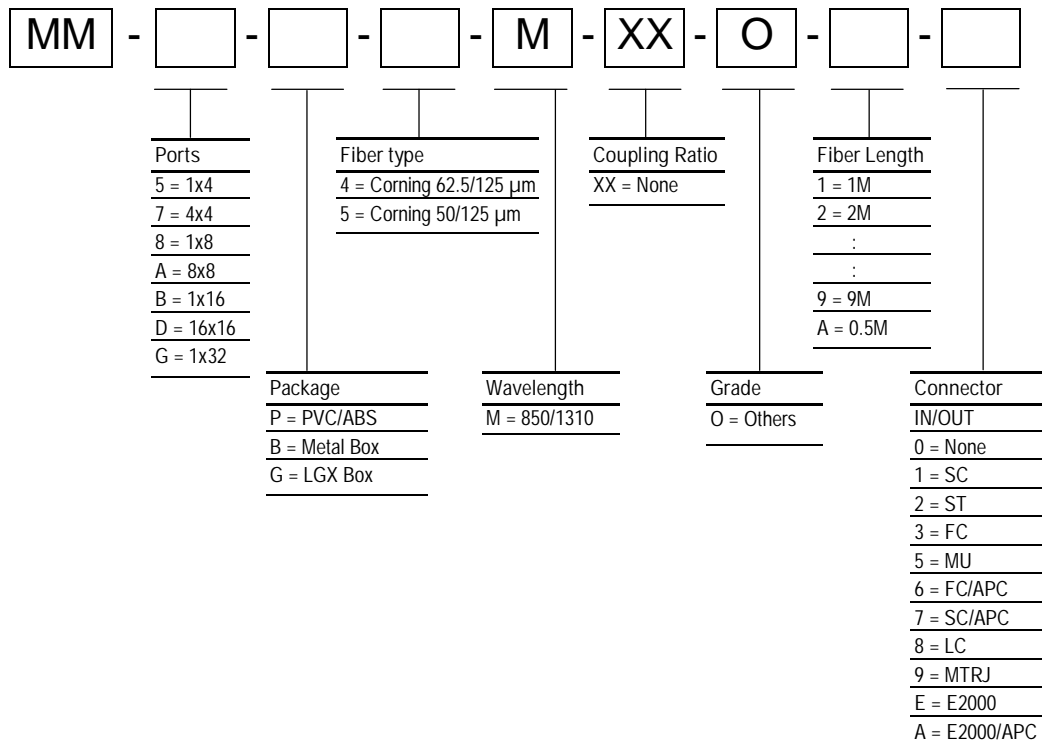

Corporate Office:
 Cube Optics AG
 Robert-Koch-Strasse 30
 55129 Mainz
 Germany

Fon: +49-6131-69851-0
 Fax: +49-6131-69851-79
 e.mail: sales@cubeoptics.com

www.cubeoptics.com