


Fiber Pigtail

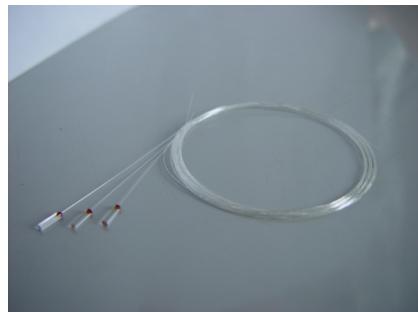

Specifications

Parameter	Unit		Specification
Wavelength	nm	-	980(15 1310 (40 1575 (50 1310/1550 (50
AR Coating	-	-	R<0.1% @ (c, R<0.25%@ operating wavelength range
Wedge Angle	Degree	-	8± 0.2
Fiber Type			Corning SMF-28 Hi 980 Hi 1060
Operating Temperature	oC	-	-5 ~ 85
Storage Temperature	°C	-	-40 ~ 85
Tensile Load	N	Max	5
Ferrule Dimension	mm	-	Φ1.8 x 6 ± 0.5 mm Φ2.1 x 6 ± 0.5 mm.

(1) Customized dimension is available.

(2) C specify – Customer specify.

Ordering Information

PGTL – –

Type	Angle	Wavelength	Ferrule Diameter	X	Fiber Type	Fiber Jacket	Fiber Length	Connector
S –Single Fiber P – Dual Fiber (Parallel) V – Dual Fiber (Vertical) T- Triple fiber	0 – 0 Degree 8 – 8 Degree	13 – 1310nm 15 – 1550nm 35 – 1310/1550 nm 98 – 980nm X – C Specify	1 – 1.8mm 2 – 2.1mm X – C specify	0	1 - Corning SMF-28 2 - Corning Hi 1060 3 - Corning Hi 980 X - C Specify	1 – 250 µm 9 – 900 µm	1 ≥ 1m 2 ≥ 2 m 3 ≥ 3 m X – C specify	0 – None 1 – FC/UPC 2 – FC/APC 3 – SC/UPC 4 – SC/APC 5 – LC 6 – MU X – C Specify

i.e.: PGTL-S81510-1110

PGTL – Single fiber pigtail, 8 degree angle, 1550 nm wavelength, 1.8mm diameter capillary – Corning SMF-28 fiber, 250 µm primary coatings, 1m fiber length, no connector.

Contact Information

For more information about BATi's leadership in variable optical attenuation and modulation technology and other optical networking modules and components, visit our website at www.bostonati.com.

To obtain additional technical information or to place an order for this product, please contact us at:

Phone: 1-781-935-2800
Fax: 1-781-935-2860
E-mail: sales@bostonati.com