

Isolator Tap Hybrid

Features

- Wide operating wavelength and temperature range
- Low insertion loss
- High isolation
- High stability and reliability
- Telcordia qualification compliant



Application


- Fiber optical amplifiers
- CATV fiber optic links
- WDM system
- Transmitters and fiber lasers

Specifications

Parameter	Unit		Single Stage	Single Stage (Low PMD)	Dual Stage
Operating Wavelength Range	nm	-	$\lambda_c \pm 20$		
Isolation (23□)	dB	Min	30	30	43
Isolation (0~65□)	dB	Min	22	22	34
Insertion Loss (Signal Channel)	dB	Max	0.6	0.7	0.9
Insertion Loss (Tap Channel)	dB	Max	21.5	21.5	21.5
Polarization Mode Dispersion	ps	Max	0.25	0.05	0.05
Polarization Dependent Loss	dB	Max	0.15		
Temperature Dependent Loss	dB	Max	0.2		
Return Loss	dB	Min	50		
Power Handling	mW	Max	300		
Operating Temperature	°C	-	-5 ~ 65		
Storage Temperature	°C	-	-40 ~ 85		
Package Dimension	mm	-	$\Phi 5.5 \times 38$ for bare fiber or 900 μm loose tube		

(1) Values referenced without connector loss. Operating temperature and all state of polarization effects are considered.


(2)



(3) C specify – Customer specify.

Package dimension

Standard package

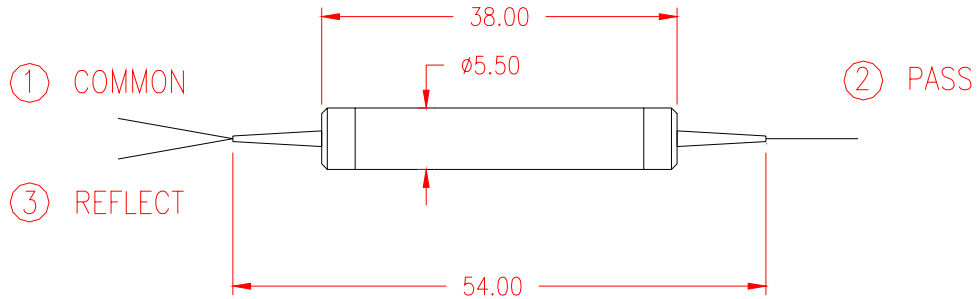

Ordering Information

ITHD — —

Tap Ratio	Single /Dual Stage	Signal wavelength	PMD Compensation	X	Fiber Type	Fiber Jacket	Fiber Length	Connector Type
01 – 1% 02 – 2% 05 – 5% ...	S – Single Stage D – Dual Stage	3 – 1310nm 4 – 1480nm 5 – 1550nm 9 – 1590nm X – C specify	1 – LOW PMD 0 – No PMD Compensation	0	1 – Corning SMF-28	1 – 250 μ m 9 – 900 μ m X – C Specify	1 $\geq$ 1m X – C Specify	0 – None 1 – FC/UPC 2 – FC/APC 3 – SC/UPC 4 – SC/APC 5 – LC 6 – MU X – C Specify

i.e. : ITHD—01S500-1110

Isolator Tap Hybrid – 1% Tap ratio, single stage, 1550nm wavelength – Corning SMF-28 fiber, 250 μ m primary coatings, 1m pigtail length, no connector.

Contact Information

For more information about BATi's' leadership in variable optical attenuation and modulation technology and other optical networking modules and components, visit our website at www.bostonati.com.

To obtain additional technical information or to place an order for this product, please contact us at:

Phone: 1-781-935-2800

Fax: 1-781-935-2860

E-mail: sales@bostonati.com