

Fiber Optic ATR-Probes for Harsh Environment



art photonics



FlexiSpec®

High throughput in selected parts
of Near & Mid InfraRed-spectra

ATR-tip shaped for immersion
in liquid flow without dead zone

Robust for industrial applications
in harsh environment up to 250°C

Resistant to high pressure

Compatible with all spectrometers
and automated process-interfaces

FlexiSpec® probes from **art photonics** include new type of Attenuated Total Reflection (ATR-) probes designed for harsh application conditions.

HT-ATR immersion IR-fiber probes can be used for process-spectroscopy in Near & Mid IR range to monitor reactions in-line in a broad temperature range from -100° to +250°C. They can resist to high pressures up to 200Bar and used with FTIR or any other IR-spectrometers and spectral sensors in automated process control with process-interfaces


Applications:

- Remote Reaction Monitoring in-line in temperature range -100/+250°C
- PAT applications in lab, pilot plant or industry with process-interfaces for automated process control
- Polymerization Process Control
- In-situ IR-Spectroscopy for PAT in Chemical, Petrochemical, Atomic, Biopharmaceutical & Food Industry

broad spectra fiber solutions

www.artphotonics.com

Transmission spectra for 1,5m probes


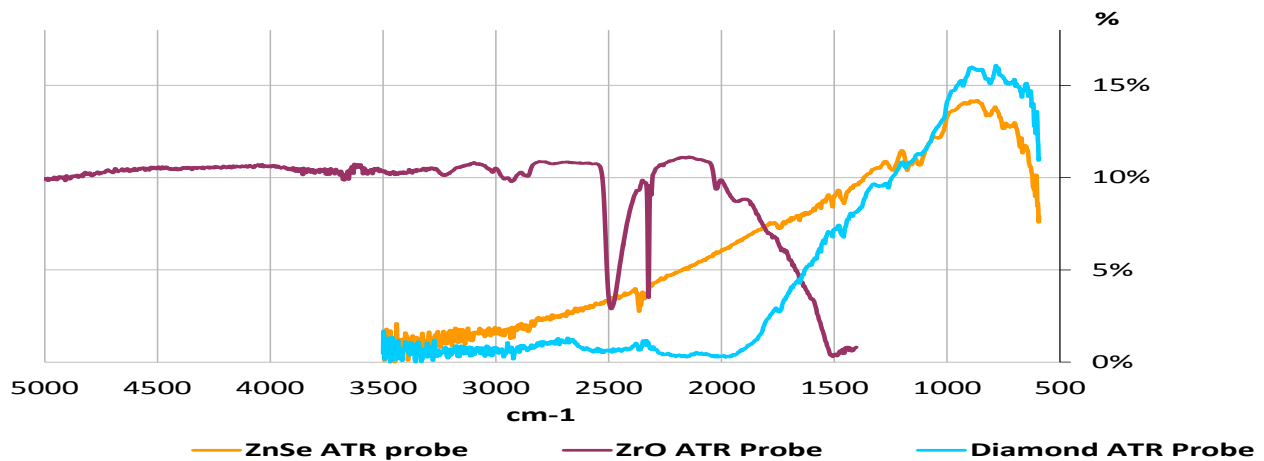


Specification of IR-Fiber HT-ATR-Probes for High Temperatures *FlexiSpec*®

Probe type	Diamond ATR	ZnSe ATR	Cubic Zirconium ATR
Transmission range	5.2-17μm (600-1900cm ⁻¹) + 3.2-4.5μm (2300-3100cm ⁻¹)	3.2-17μm (600-3100cm ⁻¹)	1.5-6.5μm (1550-6650cm ⁻¹)
Fiber type	PIR-900/1000 Silver Halide	PIR-900/1000 Silver Halide	Chalcogenide glass (As-S)
Temperature range	-100°C / + 250°C	-100°C / + 250°C	-100°C / + 200°C
Pressure (max*) *for 12mm shafts	200Bar*	10Bar*	100Bar*

Common Parameters of HT-ATR-Probes for High Temperatures *FlexiSpec*®

Total Length	1.5m (opt.: 1m to 5m)*
Shaft Length	300 mm (opt.: 300-700 mm)*
Shaft Diameter	12mm
Shaft Material	Hastelloy C22
Length of Legs	300mm (opt.: 100mm to 500mm)
Protective Tube Material	Liquid Tight SS-Conduit, KOPEX-Tube
Minimal Bending Radius	130mm
Input / Output Connectors	Long SMA (opt.: any other type)
Cooling Air Flow Parameters	Excess pressure 0.5Bar, Flow 2300l/h
Inner temperature control	Inside shaft to control fiber temperature
Compatible Process-Interfaces	Ceramat-FOS

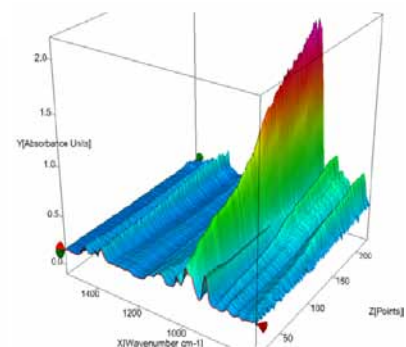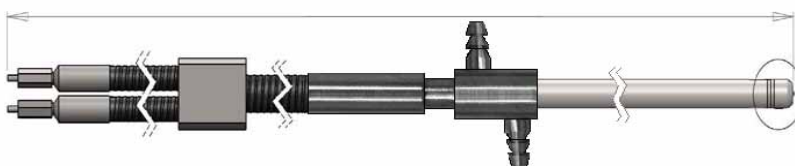

Download PDF
via smartphone

art photonics GmbH
Schwarzschildstr. 6
12489 Berlin Germany

Phone + 49 (0) 30 6789 4153
sales@artphotonics.com
www.artphotonics.com

QAS Int. - certified
DIN EN ISO 9001:2008
Zertifikat Nr. A1887GER

