
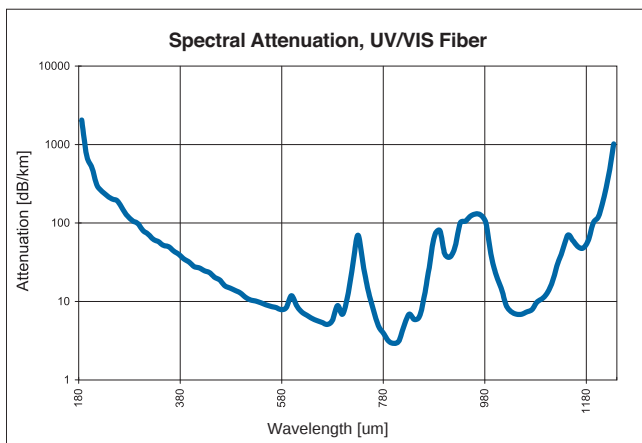


SOLARIZATION RESISTANT FIBERS

OPERATING SPECTRAL RANGE: 180-1200 NM

FEATURES

- Enhanced transmission in the Deep UV region (180-240 nm) as compared to standard UV/VIS fibers
- Laser damage resistant
- Radiation resistant
- Specialty coatings available for high temperatures, high vacuum and harsh environments
- Biocompatible materials
- Sterilizable by ETO, e-beam, gamma radiation
- Higher transmission than plastic clad silica (PCS) fibers between 200 nm and 300 nm

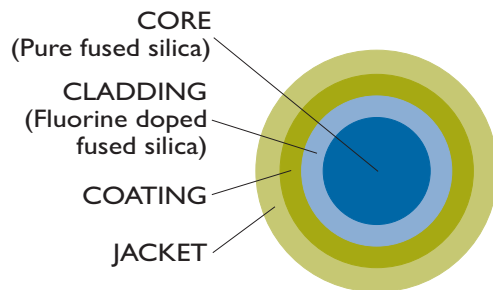

FIBER PROPERTIES

- Step index profile
- Clad/core ratio: 1.1 typical
- Numerical aperture: 0.22 ± 0.02 typical
- Proof test: 70 kpsi
- Minimum bend radius:
300 times the clad radius (momentary)
600 times the clad radius (long term)
- Laser damage threshold:
> 30 mJ/mm² (KrF, 25 ns pulse at 248 nm)
> 100 mJ/mm² (XeCl, 30 ns pulse at 308 nm)
- Radiation induced attenuation:
< 10 dB/km at dose values up to 1 Mrad

OPTIONS

Coating materials

- Acrylate (-40°C to 85°C)
- Silicone (-40°C to 150°C)
- Polyimide (-190°C to 385°C)

Jacket materials

- Acrylate (-40°C to 85°C)
- Nylon (-40°C to 100°C)
- Tefzel (-40°C to 150°C)

APPLICATIONS

Medical

- Lithotripsy
- Angioplasty
- Ophthalmology
- Photodynamic therapy
- Laser surgery

Industrial/Scientific

- Spectroscopy
- Laser welding/soldering
- Remote sensing
- Aerospace
- Military



FiberTech Optica

info@fibertech-optica.com • www.fibertech-optica.com
519.745.2763 / 514.352.6666

© April 2011 FiberTech Optica Inc. All rights reserved. No reproduction is permitted without prior authorization.



FiberTech *Optica*

**ALL SILICA SOLARIZATION RESISTANT
UV/VIS (HIGH OH⁻) FIBERS**
OPERATING SPECTRAL RANGE: 180-1200 NM

PRODUCT CODE	CORE DIAMETER [μm] ± 2 %	CLAD DIAMETER [μm] ± 2 %	COATING DIAMETER [μm] ± 3 %	STANDARD COATING	SECOND BUFFER DIAMETER [μm] ± 5 %	NUMERICAL APERTURE ± 0.02
POLYIMIDE COATED FIBERS (-190°C TO 385°C)						
SNS200/220PI	200	220	245	POLYIMIDE	-	0.22
SNS300/330PI	300	330	355	POLYIMIDE	-	0.22
SNS400/440PI	400	440	470	POLYIMIDE	-	0.22
SNS600/660PI	600	660	710	POLYIMIDE	-	0.22
NYLON JACKETED FIBERS (-40°C TO 100°C)						
SNS200/220AN	200	220	350	ACRYLATE	500	0.22
SNS300/330AN	300	330	440	ACRYLATE	650	0.22
SNS400/440AN	400	440	550	ACRYLATE	700	0.22
SNS600/660AN	600	660	800	ACRYLATE	1000	0.22
SNS800/880AN	800	880	1050	ACRYLATE	1300	0.22
SNS1000/1100AN	1000	1100	1250	ACRYLATE	1500	0.22
SNS1500/1650AN	1500	1650	1900	ACRYLATE	2200	0.22
TEFZEL JACKETED FIBERS (-40°C TO 150°C)						
SNS200/220ST	200	220	350	SILICONE	500	0.22
SNS300/330ST	300	330	450	SILICONE	700	0.22
SNS400/440ST	400	440	550	SILICONE	800	0.22
SNS600/660ST	600	660	800	SILICONE	1200	0.22
SNS800/880ST	800	880	1000	SILICONE	1550	0.22
SNS1000/1100ST	1000	1100	1250	SILICONE	1800	0.22

OPTIONAL NYLON OR TEFZEL JACKET FOR POLYIMIDE COATED FIBERS AVAILABLE.

OTHER SPECIFICATIONS UPON REQUEST.