

LPS-L-1064/350-1000mJ

**SPECIFICATIONS**

**HIGH ENERGY LAMP  
PUMPED SOLID STATE  
Q-SWITCHED LASER**




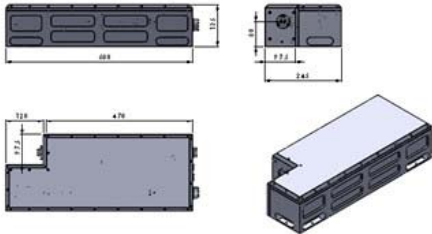
High energy lamp pumped solid state Q-switched laser at 1064nm has the features of high single pulse energy, short pulse duration, and high peak power, which is widely used in scientific research and so on.



Wavelength (nm)	1064±1			
Operating mode	Q-switched: EOM (Electro-optic modulation)			
Single pulse energy (mJ)	350	500	700	1000
Pulse duration (ns)	<10	<10	<8	<8
Rep. rate (Hz)	1~10 (adjustable)			
Energy stability	≤3%			
Warm-up time (minutes)	<15			
Beam divergence, full angle (mrad)	~1.0	~1.0	~1.0	~3.0
Beam diameter (mm)	7	8	8	9
Beam height from base plate (mm)	80			
Cooled method	Water Cooling			
Operating temperature (°C)	20~30			
Power supply (220/110VAC)	PSU-LPS-L(3U)			
Expected lifetime (hours)	10000			
Warranty period	1 year			
Available options	SHG Module, Higher Repetition Rates <20Hz, Jitter~1ns, Sdev			



If you have any further requirement about the specification, please contact CNI sales.

LPS-L-1064		PSU-LPS-L (3U)	Water chiller
			
		<p style="text-align: center;">480 (L) ×450(W) ×175(H) mm<sup>3</sup>, 16 kg</p> <p style="text-align: center;">Rep. rate and Voltage can be adjusted by touch screen</p>	<p style="text-align: center;">330(L) ×450(W) ×600(H) mm<sup>3</sup>, 41kg</p>
<p style="text-align: center;">600 (L) ×245(W) ×135(H) mm<sup>3</sup>, 24kg</p>			