

**MLL-N-1064/4000~5000mW**

### LOW NOISE INFRARED LASER AT 1064 nm









All solid state low noise infrared laser at 1064 nm is made features of ultra compact, long lifetime, low cost and easy operating, which is used in scientific experiment, optical instrument, optical sensor, measurement, communication, spectrum analysis, etc.



#### SPECIFICATIONS

|                                     |                              |           |           |
|-------------------------------------|------------------------------|-----------|-----------|
| Wavelength (nm)                     | 1064±1                       |           |           |
| Output power (mW)                   | >4000, 4200, 4400, ... ,5000 |           |           |
| Transverse mode                     | Near TEM <sub>00</sub>       |           |           |
| Operating mode                      | CW                           |           |           |
| Power stability (rms, over 4 hours) | <1%, <3%, <5%                |           |           |
| Noise of amplitude(rms,1~20MHz)     | <1%                          |           |           |
| Warm-up time (minutes)              | <10                          |           |           |
| M <sup>2</sup> factor               | <3.0                         |           |           |
| Beam divergence, full angle (mrad)  | <1.5                         |           |           |
| Beam diameter at the aperture (mm)  | ~3.0                         |           |           |
| Beam height from base plate (mm)    | 68.2                         |           |           |
| Polarization ratio                  | >100:1                       |           |           |
| Operating temperature (°C)          | 10~35                        |           |           |
| Power supply (90-264VAC)            | PSU-H-LED                    | PSU-H-FDA | PSU-N-OEM |
| Expected lifetime (hours)           | 10000                        |           |           |
| Warranty period                     | 1 year                       |           |           |

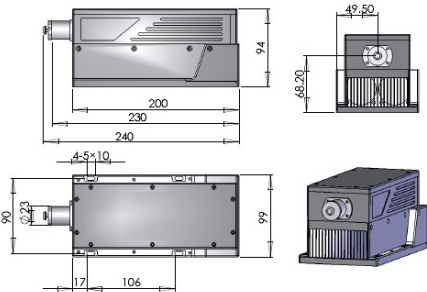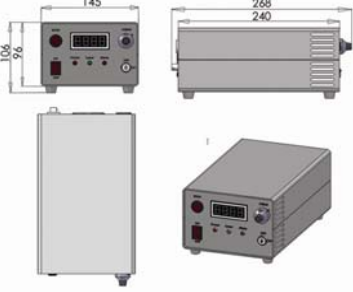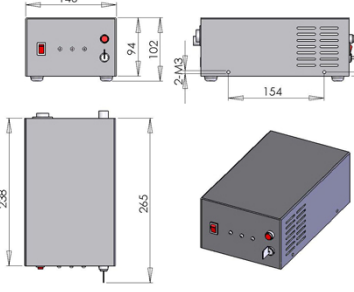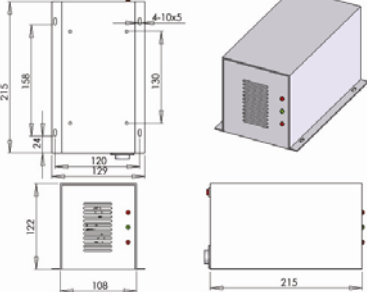

| MxL-N-1064  | PSU-H-LED  | PSU-H-FDA   | PSU-N-OEM   |
|---|--|---|---|
| <br>240(L)×99(W)×94(H) mm <sup>3</sup> , 2.6 kg | <br>268(L)×145(W)×106(H) mm <sup>3</sup> , 2.6 kg | <br>238(L)×146(W)×102(H) mm <sup>3</sup> , 2.3 kg | <br>215(L)×129(W)×122(H) mm <sup>3</sup> , 2.145 kg |
|    |    |    |    |