


# DynaLED® Series



P/N No.	Dimension (mm)	Correlated Color Temperature(K)	Grade of CRI	Luminous Intensity(mcd)	Forward Voltage(V)	Power Dissipation	View Angle
TAW118DB	3.5 * 2.8 * 1.9	5000~7000	CRI >90 Ra	1650~2500	4.0~6.0	0.14 W	120°
TAWW118DB-0S	3.5 * 2.8 * 1.9	3000~5000	CRI >90 Ra	1650~2500	4.0~6.0	0.14 W	120°
TAW388DB-0S	3.5 * 2.8 * 1.9	5000~7000	CRI >90 Ra	1650~2500	4.0~6.0	0.14 W	120°
TAWW388DB-0S	3.5 * 2.8 * 1.9	3000~5000	CRI >90 Ra	1650~2500	4.0~6.0	0.14 W	120°
TCW5050DB	5.0 * 5.0 * 1.5	5000~7000	CRI >90 Ra	3600~6000	10.0~13.0	0.39 W	120°
TCWW5050DB-0S	5.0 * 5.0 * 1.5	3000~5000	CRI >90 Ra	3600~6000	10.0~13.0	0.39 W	120°
SDW5050DB-7C	5.0 * 5.1 * 1.3	5000~7000	CRI >90 Ra	12000~30000	20.0~24.0	0.72 W	120°
SDWW5050DB-7C	5.0 * 5.1 * 1.3	3000~5000	CRI >90 Ra	12000~30000	20.0~24.0	0.72 W	120°
SDW5050DB-0S	5.0 * 5.1 * 1.3	5000~7000	CRI >90 Ra	12000~30000	10.0~13.0	0.91 W	120°
SDWW5050DB-0S	5.0 * 5.1 * 1.3	3000~5000	CRI >90 Ra	12000~30000	10.0~13.0	0.91 W	120°
SEW5050DB-GC	5.0 * 5.1 * 1.3	5000~7000	CRI >90 Ra	12000~40000	10.0~14.0	1.56 W	120°
SEWW5050DB-GC	5.0 * 5.1 * 1.3	3000~5000	CRI >90 Ra	12000~40000	10.0~14.0	1.56 W	120°

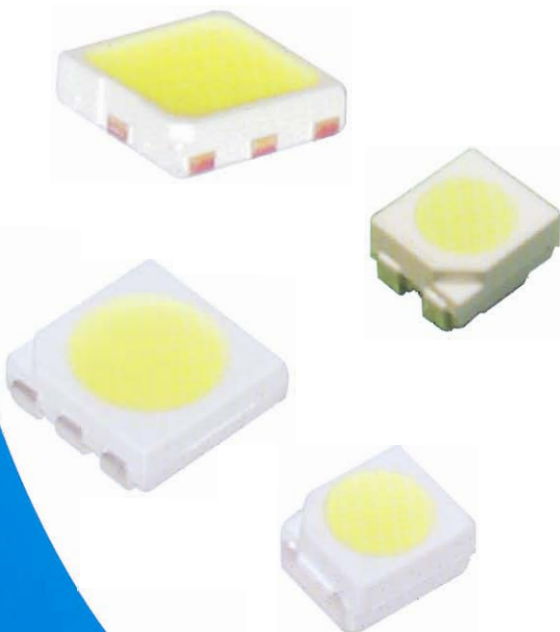

Country	Patent Filed No.		Pending
TAIWAN	I252593 I228837 I263356 I244218 I247436 I264269	I250672 I250674 M285713 M285714 M283330 M303488	0941084** 0941120** 0941380**
JAPAN	3124555 3128699 3118485 3118164 3118574		特願2003-1166** 特願2003-3764** 特願2004-0802**
USA	US7,207,691 B2		10/705, **** 10/945, ****
CHINA	821490 822271 822134 803388	809668 829555 822778	2004100161**.* 2004100528**.*
KOREA	392880 20-0421146 20-0419129	0410425 0406990 402111	2004-390** 2004-334**
GERMANY	202004020786.9 202004020550.5		

**UBLeds Co., LTD.** [www.ubleds.com.tw](http://www.ubleds.com.tw)

2F, No. 208, Sec. 3, Zhongyang Rd., Tucheng City, Taipei County 236, Taiwan

TEL: 886-2-2268-2988 (Rep. No.)

FAX: 886-2-2268-2991