

HPL-660-Q/5~10mJ/50~100W

**LD PUMPED ALL-SOLID-STATE  
AOM Q-SWITCHED LASER**


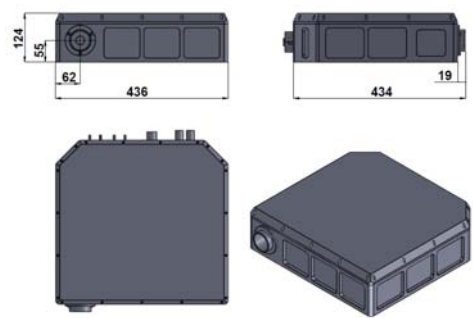


All solid state AOM Q-switched laser at 660nm has the features of high peak power, high repetition rate, and short pulse duration, which is widely used in measurement, research, and so on.



SPECIFICATIONS

Wavelength (nm)	660±1
Operating mode	Q-switched: AOM (Acousto-Optic Modulation)
Single pulse energy (mJ)	5.0~10.0
Pulse duration (ns)	~100
Peak power (kW)	50~100
Rep. rate (kHz)	5~100, adjustable
Average power (W)	Average power (W) = Single pulse energy (mJ) * Rep. rate (kHz) 50~100@10kHz, typical
Ave power stability (over 4 hours)	<3%, <5%
Warm-up time (minutes)	<10
Beam divergence, full angle (mrad)	<3.5
Beam diameter at the aperture (mm)	~14.0
Beam height from base plate (mm)	55.0
Cooled method	Water Cooled
Operating temperature (°C)	15~35
Power supply (220/110VAC)	PSU-HPL-Q(8U)
Expected lifetime (hours)	10000
Warranty period	1 year



HPL-660-Q		PSU-HPL-Q(8U)	Water chiller
			
434 (L) × 436 (W) × 124 (H) mm <sup>3</sup> , 23kg		485 (L) × 325 (W) × 184 (H) mm <sup>3</sup> , 26kg	504 (L) × 624 (W) × 905 (H) mm <sup>3</sup> , 95kg